CONFORM COPY

DAVID A. DILLARD, CA Bar No. 97515
E-mail: david.dillard@cph.com
ANNE F. BRADLEY, CA Bar No. 252563
E-mail: anne.bradley@cph.com
CHRISTIE, PARKER & HALE, LLP
350 West Colorado Boulevard, Suite 500
Post Office Box 7068
Pasadena, California 91109-7068
Telephone: (626) 795-9900
Facsimile: (626) 577-8800

Attorneys for Plaintiff,
Vederi, LLC

FILED
CLERK, U.S. DISTRICT COURT
OCT 15 2010
2:51
CENTRAL DISTRICT OF CALIFORNIA
BY DEPUTY

UNITED STATES DISTRICT COURT

CENTRAL DISTRICT OF CALIFORNIA

VEDERI, LLC, A LIMITED LIABILITY COMPANY

Plaintiff,

vs.

GOOGLE, INC., A DELAWARE CORPORATION

Defendant.

Case No. CV10 7747-JHN (CWx)

COMPLAINT FOR PATENT INFRINGEMENT; DEMAND FOR JURY TRIAL

For its Complaint, Plaintiff, Vederi, LLC ("Vederi"), alleges as follows:

1. This is an action for patent infringement, brought under the patent laws of the United States, 35 U.S.C. § 271 et seq.

I. JURISDICTION AND VENUE.

2. This is an action for patent infringement brought under the patent laws of the United States, 35 U.S.C. § 271 *et seq*. Jurisdiction of the patent infringement claims is conferred on this Court under 28 U.S.C. §§ 1331 and 1338(a).

3. This Court has personal jurisdiction over the Defendant Google, Inc. ("Google") under Fed. R.Civ.P.4(k)(1)(A).

CONFORM COPY

4. Venue is proper in this district under 28 U.S.C. § 1391 in that the unlawful activities herein alleged were performed in whole or in part in this district and in that Defendant does business in this district.

II. PARTIES.

5. Plaintiff, Vederi, is a limited liability company having its principal place of business at 273 Waverly Drive, Pasadena, CA 91105.

6. Defendant, Google, is a Delaware corporation having a place of business at 1600 Amphitheatre Parkway, Mountain View, California 94043.

COUNT ONE - PATENT INFRINGEMENT

7. Plaintiff Vederi is the owner of U.S. Patent Nos. 7,239,760 (the "'760 patent"), 7,577,316 (the "'316 patent"), 7,805,025 (the "'025 patent") and 7,813,596 (the "'596 patent") entitled "System and Method for Creating, Storing and Utilizing Images of a Geographic Location" The '760, '316, '025 and '596 patents disclose, *inter alia,* systems and composite images for enabling visual navigation of a geographic area from a user terminal. True and correct copies of The '760, '316, '025 and '596 patents are attached hereto as Exhibits A -D.

8. One information and belief, Defendant Google creates, uses, markets, sells, and offers for sale throughout the United States and commercially exploits systems and composite images for enabling ground level, visual navigation of a geographic area from a user terminal including its "Street View" service. Google's ground level, visual navigation services are products used in commerce within this district.

9. Defendant's manufacture, use, sale and offer for sale of the Google products constitutes infringement of the '760, '316, '025 and '596 patents under 35 U.S.C. § 271.

10. Plaintiff has suffered and continues to suffer substantial damage as a direct result of Google's infringement. Under 35 U.S.C. § 284, Plaintiff is entitled to damages adequate to compensate for the infringement, but not less than a

reasonable royalty.

11. Vederi will be irreparably harmed if Google's patent infringement continues. The balance of equities and public interest favor an injunction in favor of Vederi. Vederi therefore requests permanent injunctive relief prohibiting Google and its officers, employees, agents, affiliates, and anyone else in active concert with it, from making or using, the Google Street View service, or taking any other actions that would otherwise infringe the '760, '316, '025 and '596 patents.

WHEREFORE, Vederi respectfully requests that this Court enter judgment:

1. That Google has infringed the '760, '316, '025 and '596 patents;

2. Entering a permanent injunction restraining Google and its officers, employees, agents, affiliates, and anyone else in active concert with it, from making, using, marketing, commercially exploiting or taking any other actions that would directly or indirectly infringe the '760, '316, '025 or '596 patents;

3. That this case is exceptional, and that Vederi therefore recover reasonable costs, expenses, and attorney's fees, under 35 U.S.C. § 285;

4. That Vederi recover such other and further relief as this court may deem appropriate.

DATED: October 15, 2010

Respectfully submitted,
CHRISTIE, PARKER & HALE, LLP

By _____
David A. Dillard, Esq.
Anne F. Bradley, Esq.

Attorneys for Plaintiff,
Vederi, LLC

JURY DEMAND

Plaintiff requests a jury trial of all issues in this action so triable.

DATED: October 15, 2010

Respectfully submitted,
CHRISTIE, PARKER & HALE, LLP

By _____
David A. Dillard, Esq.

Attorneys for Plaintiff,
Vederi, LLC

RG PAS798352.1-*-10/15/10 10:42 AM

Exhibit A

US007239760B2

(12) **United States Patent**
Di Bernardo et al.

(10) **Patent No.: US 7,239,760 B2**
(45) **Date of Patent: Jul. 3, 2007**

(54) **SYSTEM AND METHOD FOR CREATING, STORING, AND UTILIZING COMPOSITE IMAGES OF A GEOGRAPHIC LOCATION**

(76) Inventors: **Enrico Di Bernardo**, 783 N. Craig Ave., Pasadena, CA (US) 91104; **Luis F. Goncalves**, 1133 Pine St. #109, South Pasadena, CA (US) 91030

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/130,004**

(22) Filed: **May 16, 2005**

(65) **Prior Publication Data**

US 2005/0207672 A1 Sep. 22, 2005

Related U.S. Application Data

(62) Division of application No. 09/758,717, filed on Jan. 11, 2001, now Pat. No. 6,895,126.

(60) Provisional application No. 60/238,490, filed on Oct. 6, 2000.

(51) **Int. Cl.**

G06K 9/60	(2006.01)
G08G 1/123	(2006.01)
H04N 7/00	(2006.01)
G01C 21/00	(2006.01)

(52) **U.S. Cl.** **382/305**; 340/995.1; 348/113; 701/207

(58) **Field of Classification Search** 382/103, 382/104, 113, 305, 284, 285; 340/990, 995.1, 340/995.11, 995.17; 348/113–118; 701/200–213; 707/1, 100

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,796,191 A * 1/1989 Honey et al. 701/217
5,381,338 A * 1/1995 Wysocki et al. 701/207
5,633,946 A 5/1997 Lachinski et al.
5,668,739 A 9/1997 League et al.
5,802,492 A * 9/1998 DeLorme et al. 455/456.5
5,926,116 A 7/1999 Kitano et al.

(Continued)

OTHER PUBLICATIONS

Lin-Eftekhar, Judy, "Virtual Los Angeles Today—A Virtual World Tomorrow" Article, Quest, 2000, pp. 4-8, 40.

(Continued)

Primary Examiner—Kanjibhai Patel
(74) *Attorney, Agent, or Firm*—Christie, Parker & Hale, LLP

(57) **ABSTRACT**

A system and method synthesizing images of a locale to generate a composite image that provide a panoramic view of the locale. A video camera moves along a street recording images of objects along the street. A GPS receiver and inertial navigation system provide the position of the camera as the images are being recorded. The images are indexed with the position data provided by the GPS receiver and inertial navigation system. The composite image is created on a column-by-column basis by determining which of the acquired images contains the desired pixel column, extracting the pixels associated with the column, and stacking the columns side by side. The composite images are stored in an image database and associated with a street name and number range of the street being depicted in the image. The image database covers a substantial amount of a geographic area allowing a user to visually navigate the area from a user terminal.

38 Claims, 18 Drawing Sheets

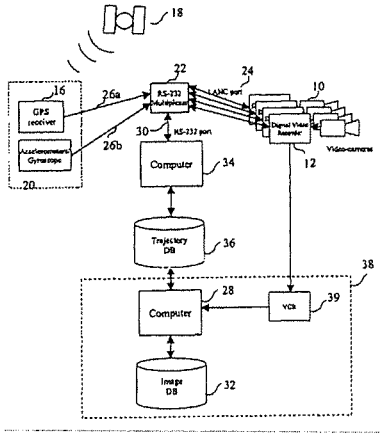


EXHIBIT A
PAGE 5

U.S. PATENT DOCUMENTS

5,961,571	A		10/1999	Gorr et al.
6,005,611	A		12/1999	Gullichsen et al.
6,009,188	A		12/1999	Cohen et al.
6,035,253	A		3/2000	Hayashi et al.
6,081,206	A	*	6/2000	Kielland 340/937
6,097,394	A		8/2000	Levoy et al.
6,140,943	A	*	10/2000	Levine 340/995.12
6,327,533	B1	*	12/2001	Chou 701/207
6,335,754	B1		1/2002	Endo et al.
6,356,297	B1		3/2002	Cheng et al.
6,487,495	B1	*	11/2002	Gale et al. 701/209
6,552,744	B2		4/2003	Chen
6,674,434	B1		1/2004	Chojnacki et al.
6,977,630	B1	*	12/2005	Donath et al. 345/7

OTHER PUBLICATIONS

Reyes, David, "Orange County Freezes Ambitious Aerial Photography Project" Article, Los Angeles Times Newspaper, Metro Section, Oct. 16, 2000, pp. B1, B5.

* cited by examiner

EXHIBIT 4
PAGE 6

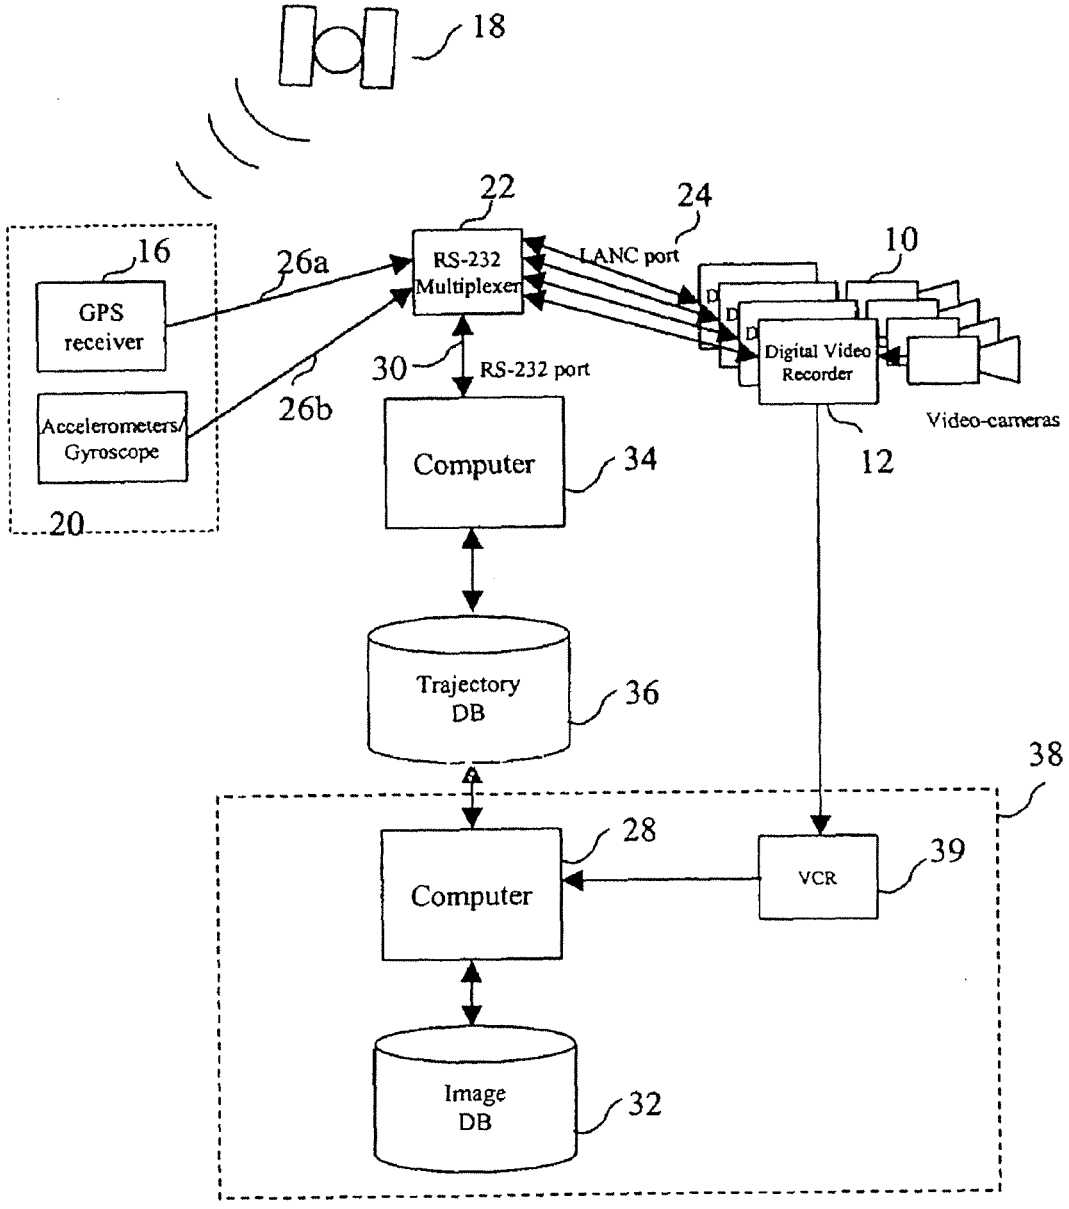


Fig. 1

EXHIBIT A
PAGE 1

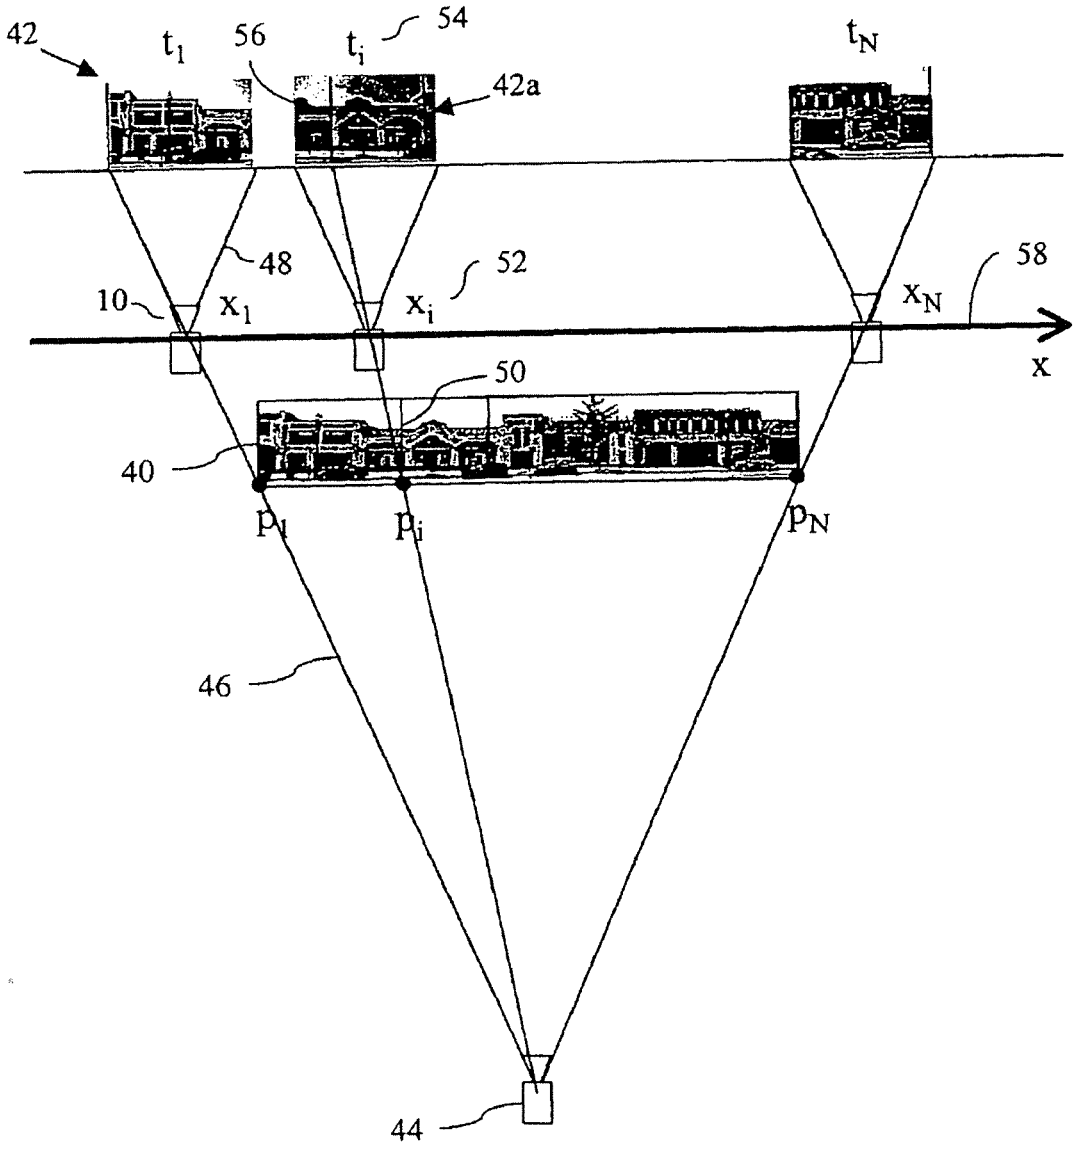


Fig.2

EXHIBIT A
PAGE 9

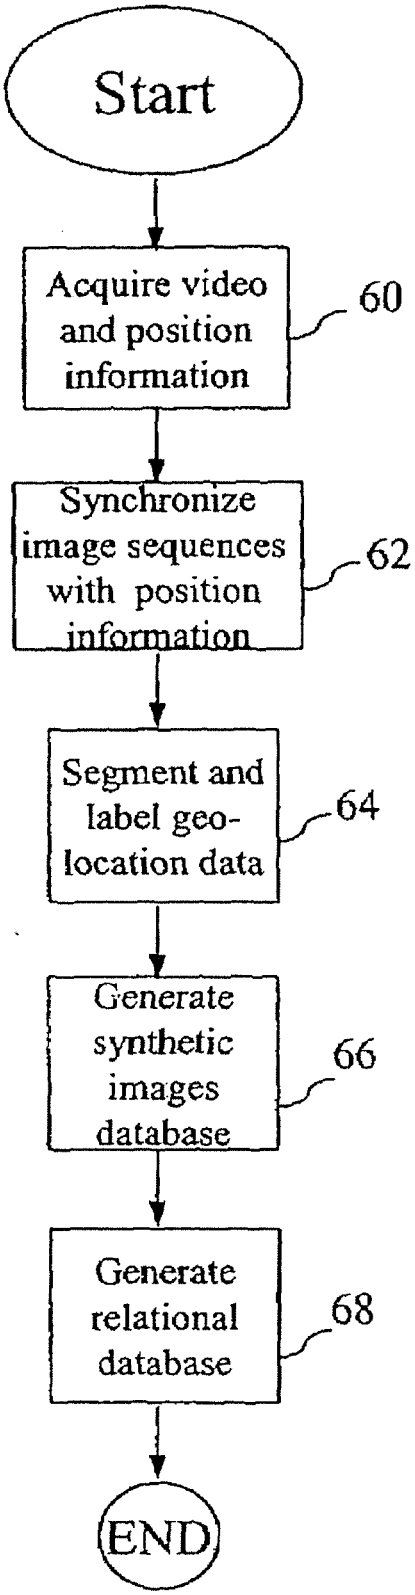


Fig.3

EXHIBIT A
PAGE 4

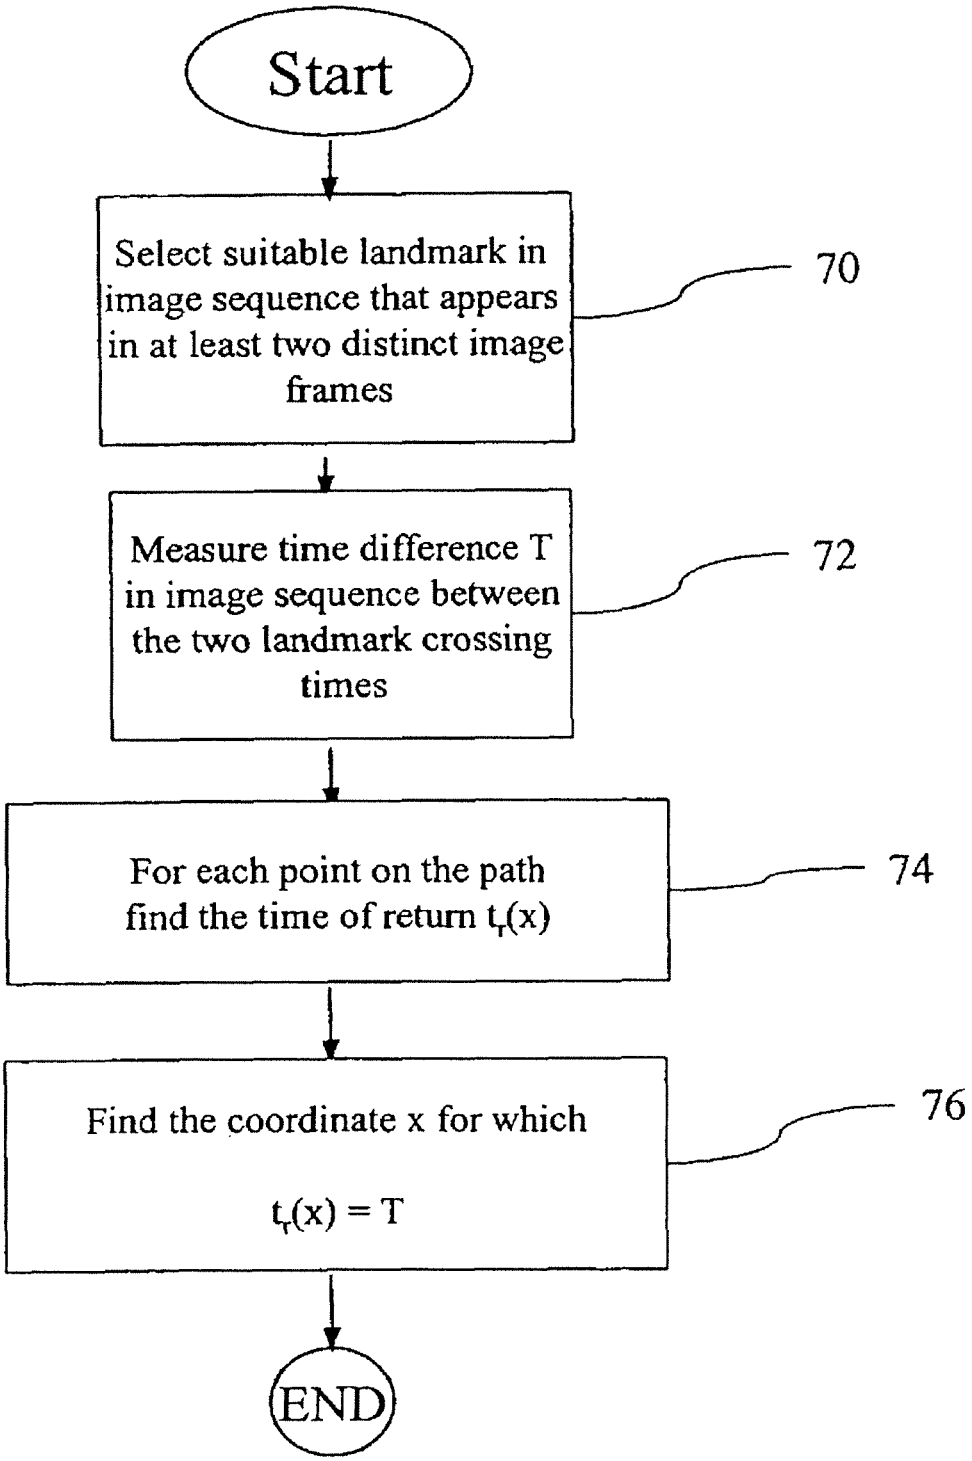


Fig.4

EXHIBIT A
PAGE 10

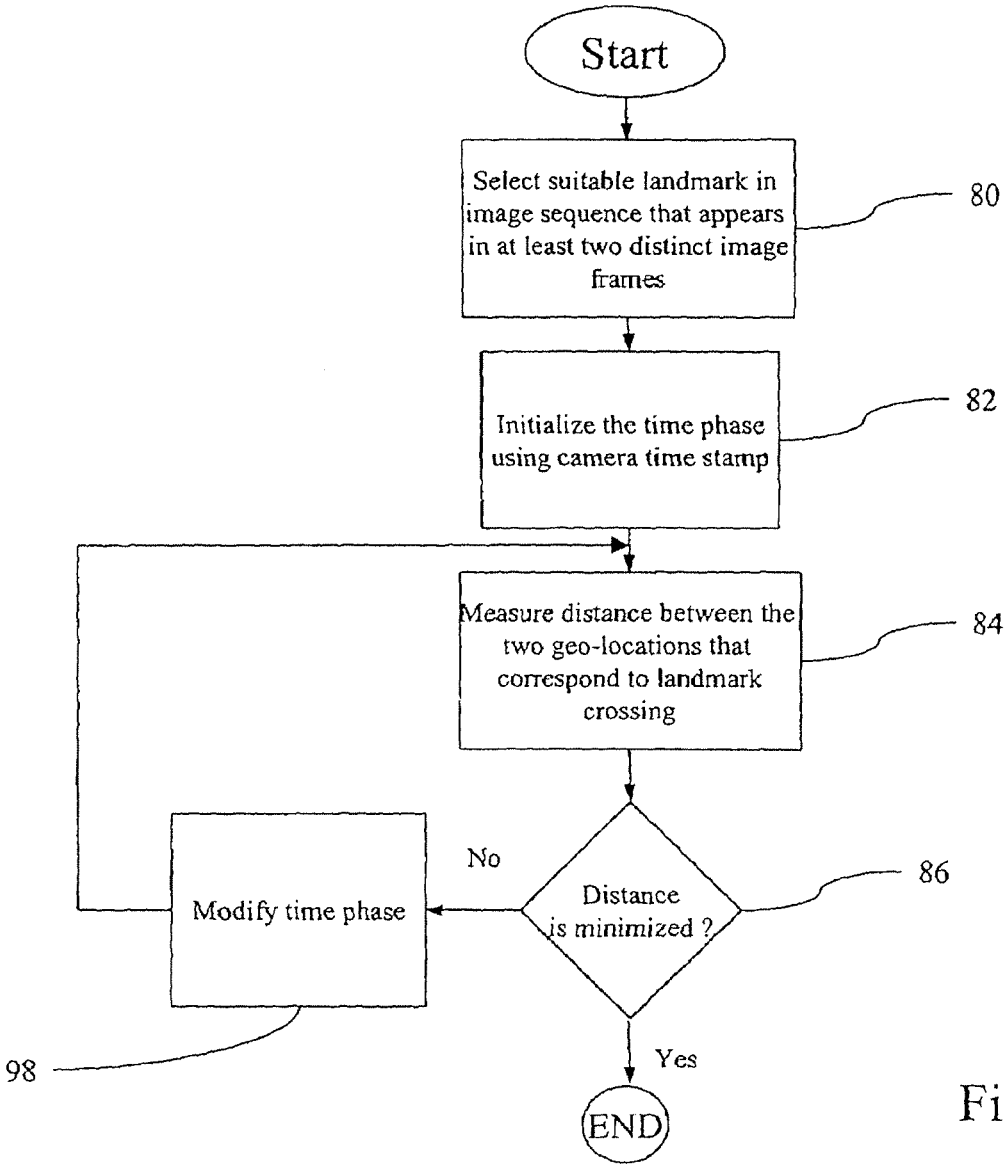


Fig.5

EXHIBIT 4
PAGE 11

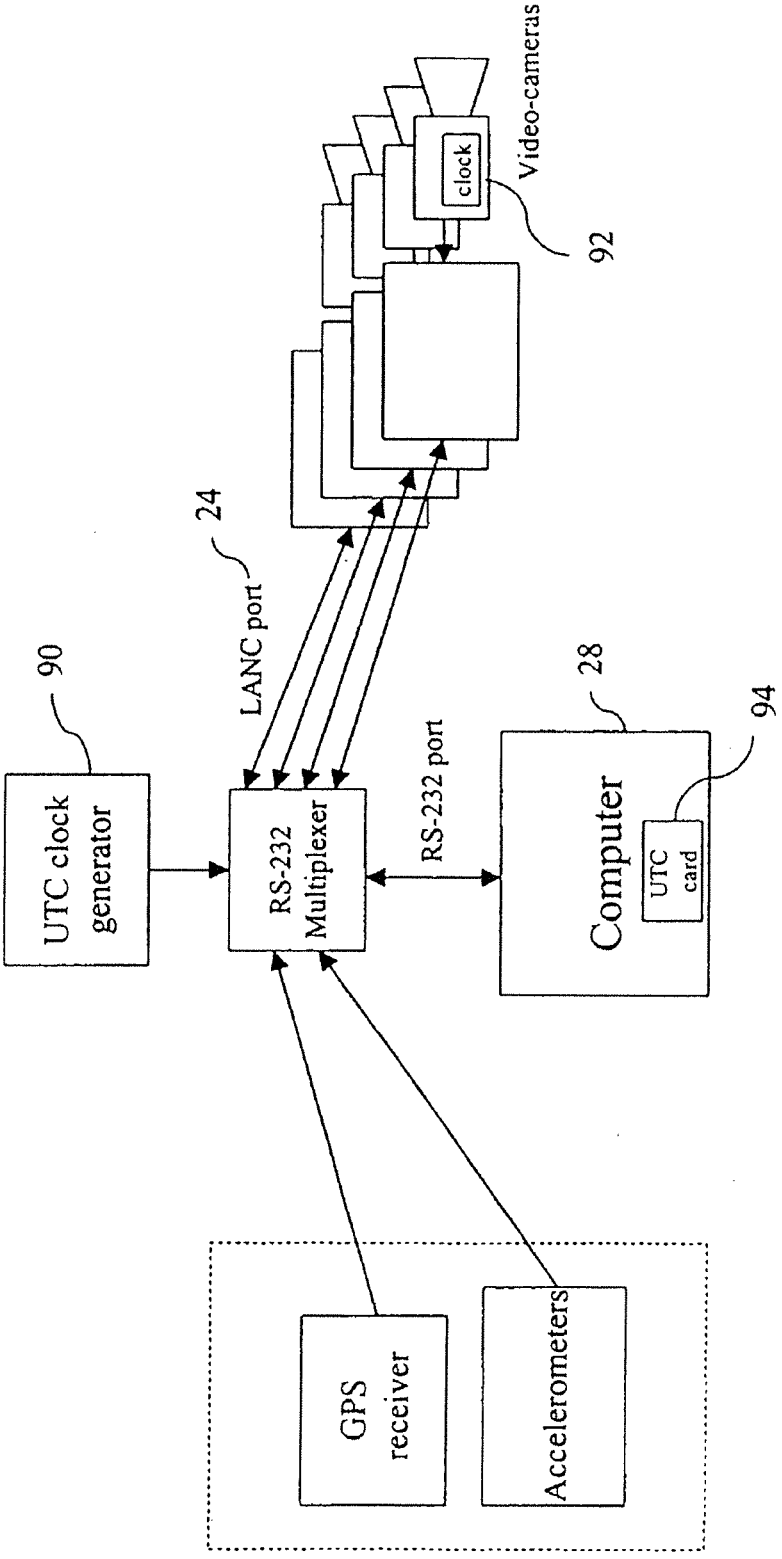


Fig.6

EXHIBIT 4
PAGE 12

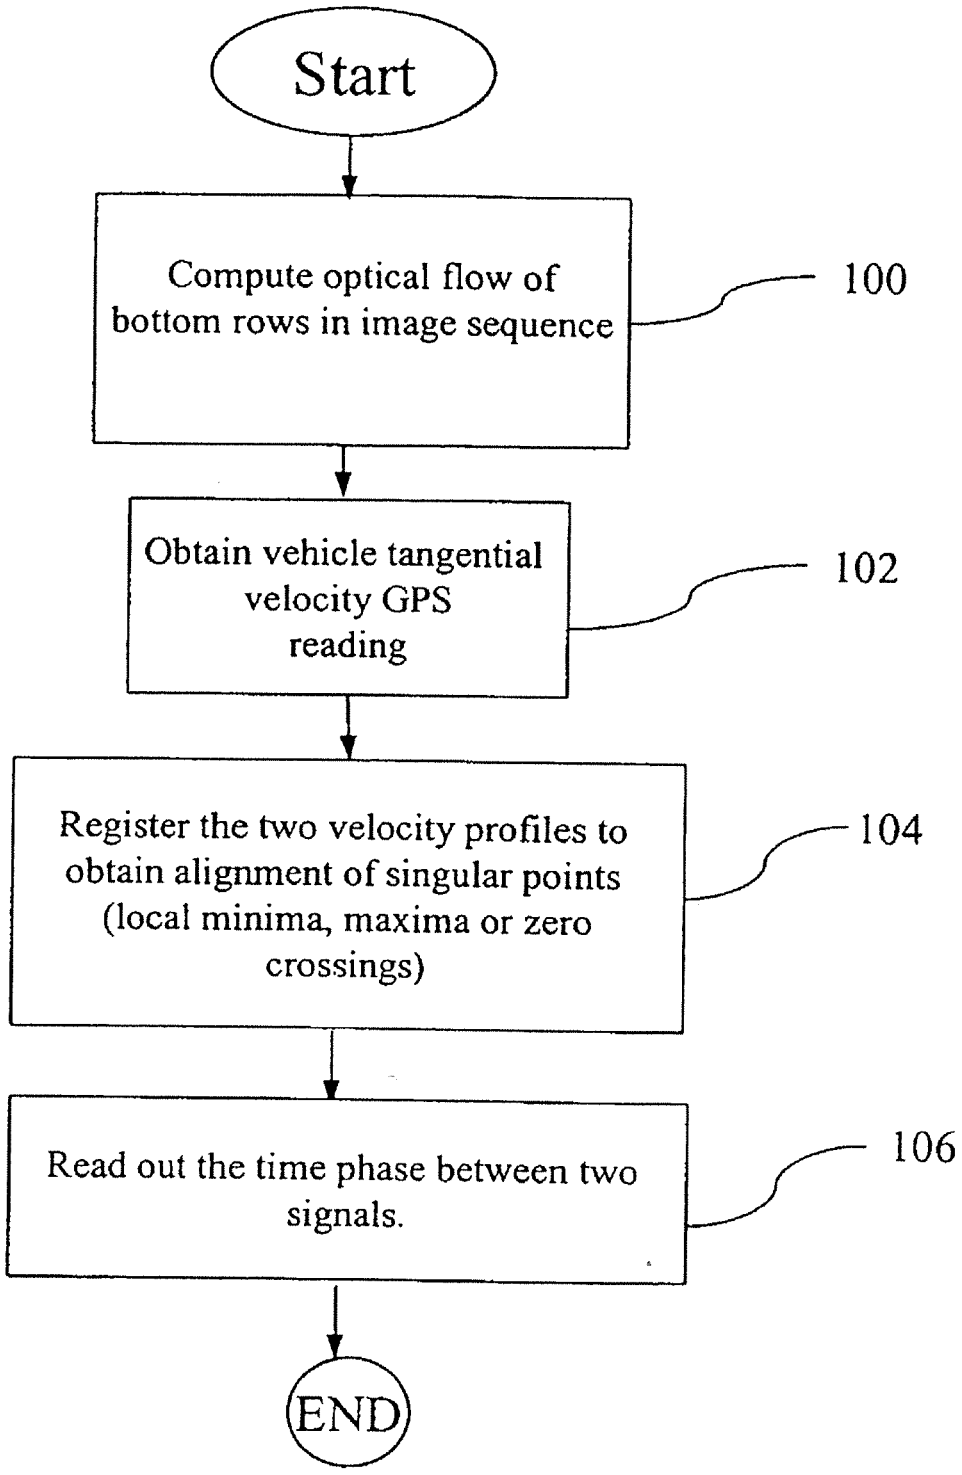


Fig.7

EXHIBIT A
PAGE 13

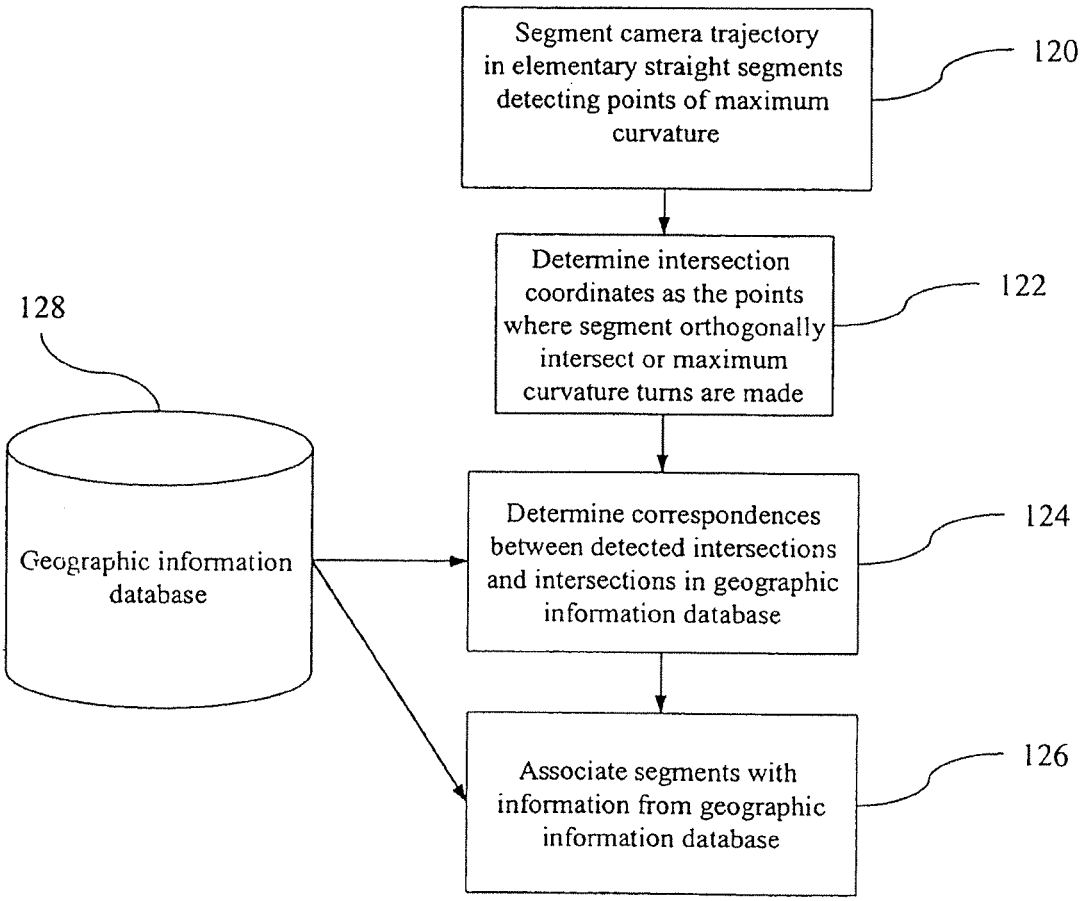


Fig.8

EXHIBIT A
PAGE 14

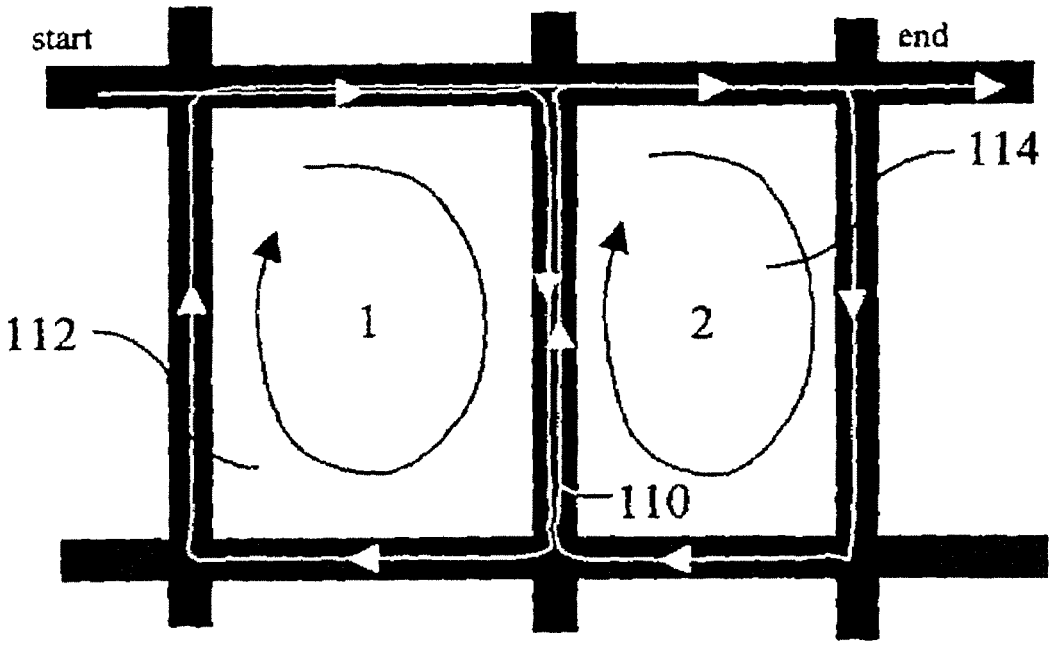


Fig.9

EXHIBIT A
PAGE 15

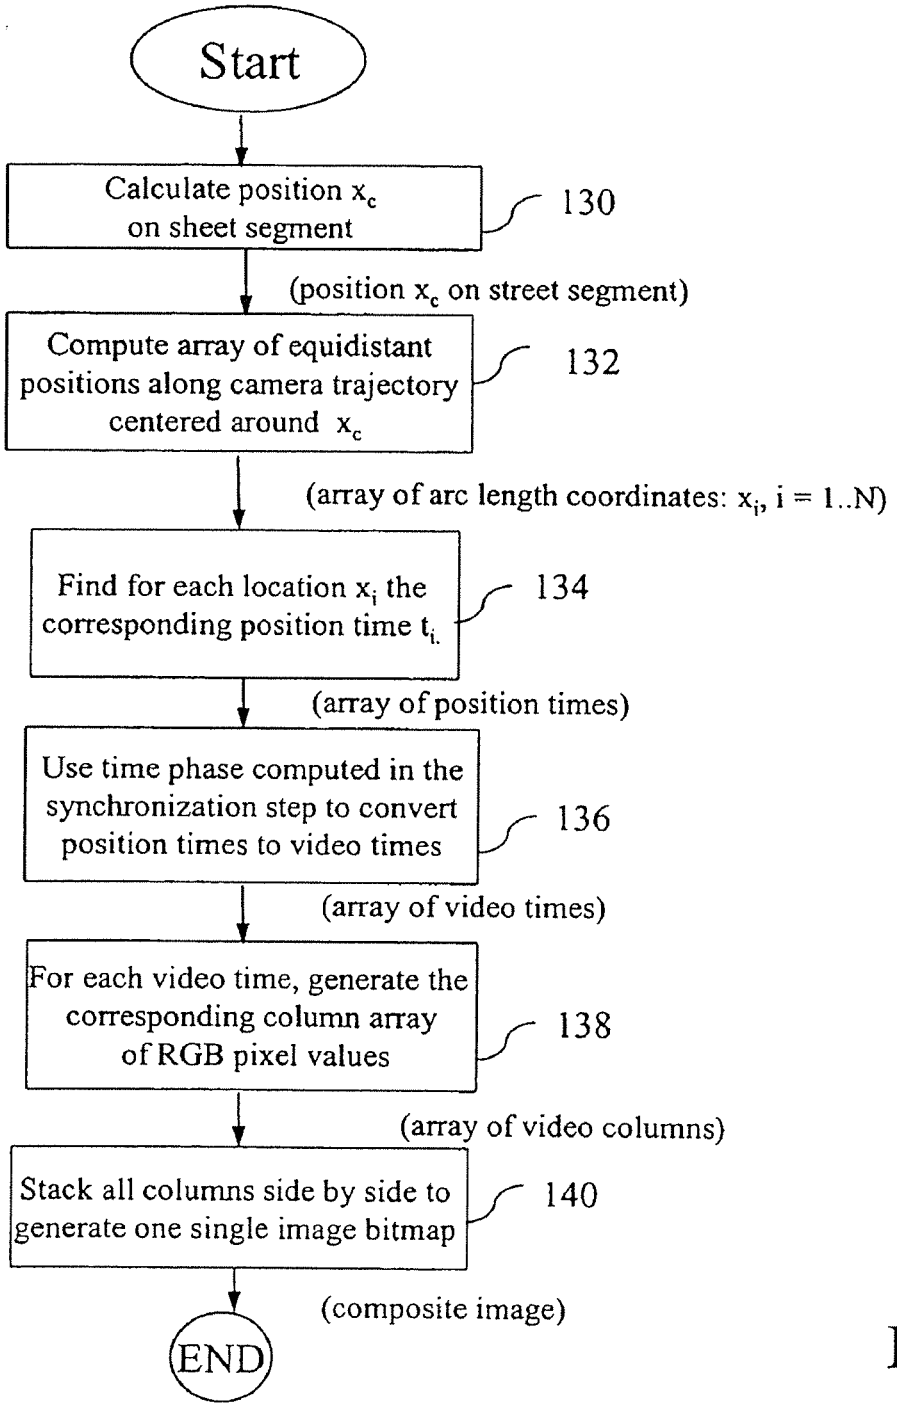


Fig.10

EXHIBIT A
PAGE 16

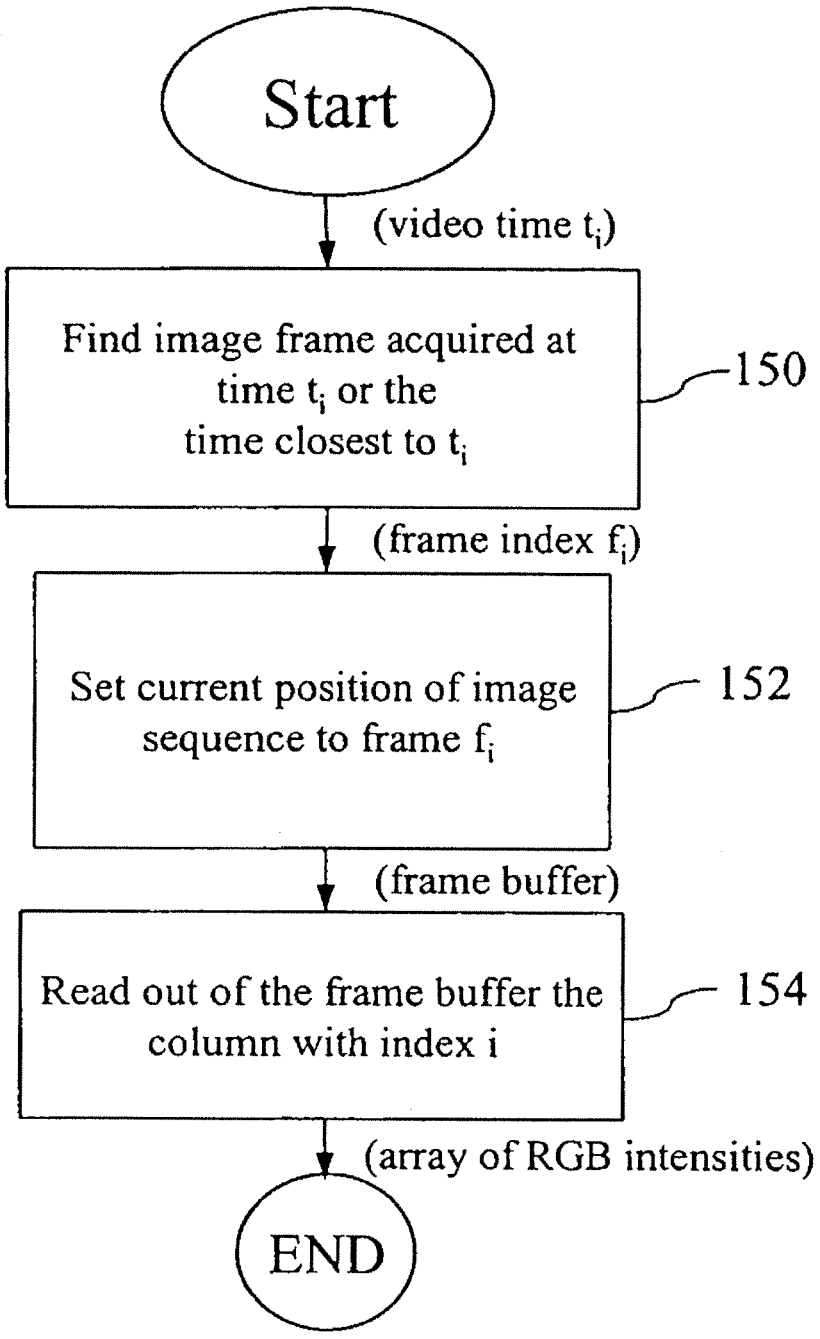


Fig.11

EXHIBIT A
PAGE 17

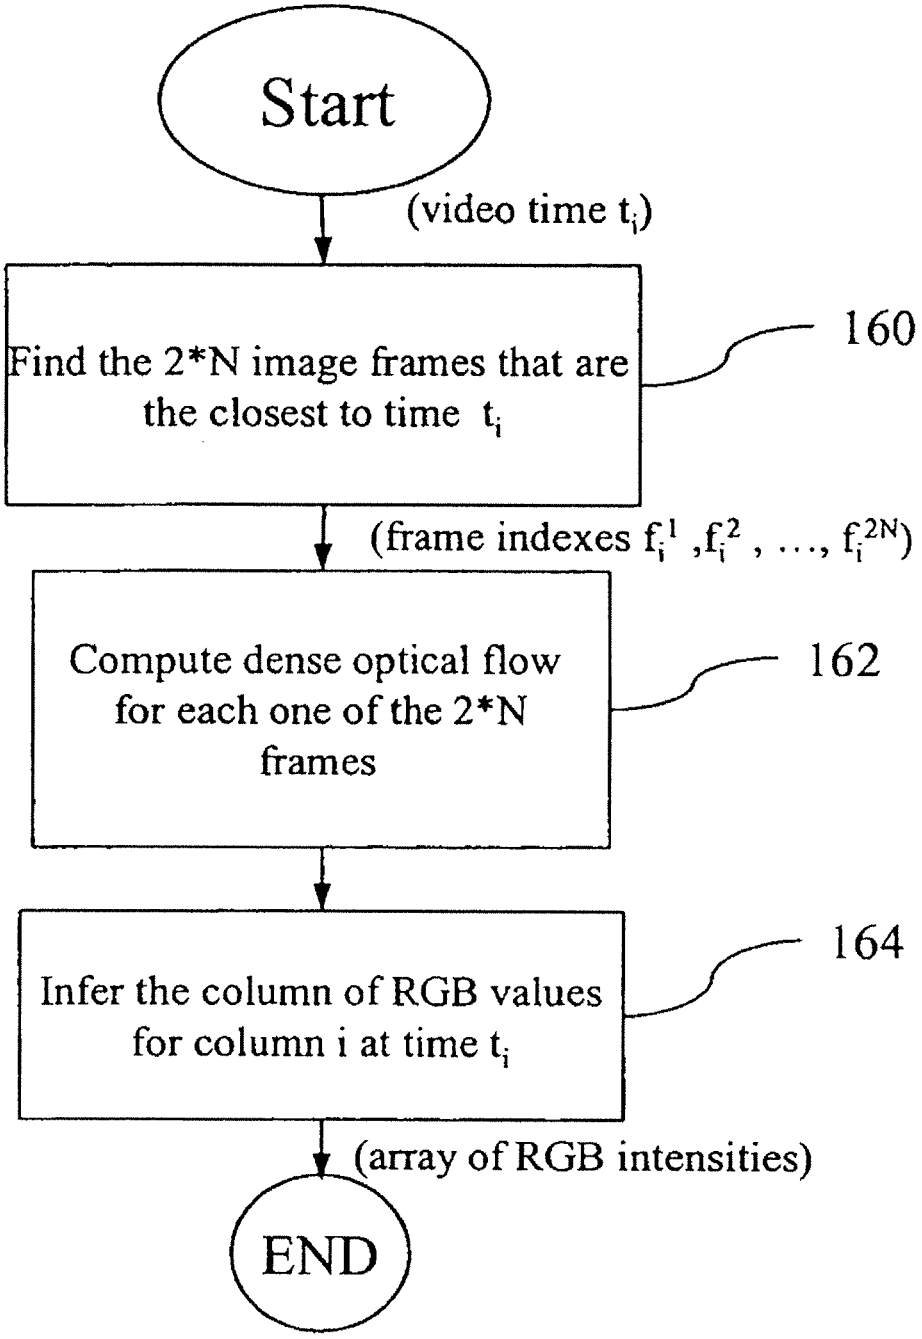


Fig.12

EXHIBIT A
PAGE 18

172 Segment ID	174 Street Name	176 Side of Street with Respect to Hub	178 End Point Coordinates	180 Segments Adjacent to From Coordinates	182 Segments Adjacent to To Coordinates	184 Distance from Hub	186 Length of Trajectory Segment	188 Offset
1	Colorado Boulevard	West	(10, 10), (50, 10)	2(N) 4(S) 3(W) 1(E)	5(N) 7(S) 1(W) 6(E)	(120m, 122m)	(28m, 30m)	(2,0)
6	Colorado Boulevard	West	(50, 10) (65,10)	5(N) 7(S) 1(W) 6(E)	8(W) 10(S) 6(W) 9(E)	(130m, 134m)	(20m, 22m)	(0,0)

170

Fig. 13

EXHIBIT 4
PAGE 19

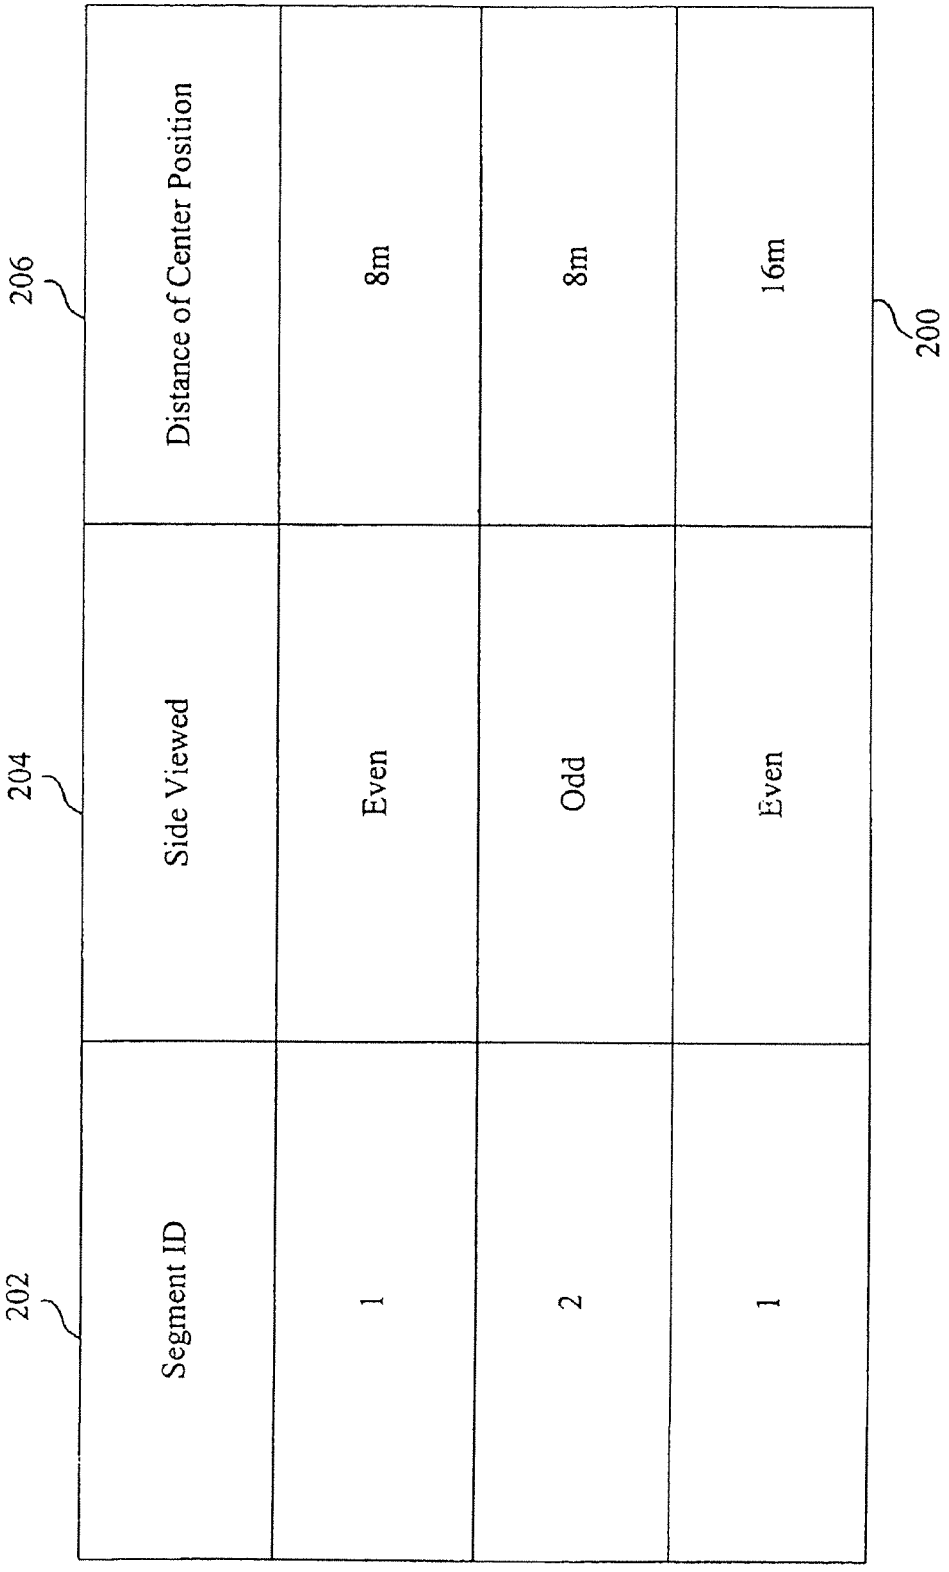


Fig. 14

EXHIBIT A
PAGE 20

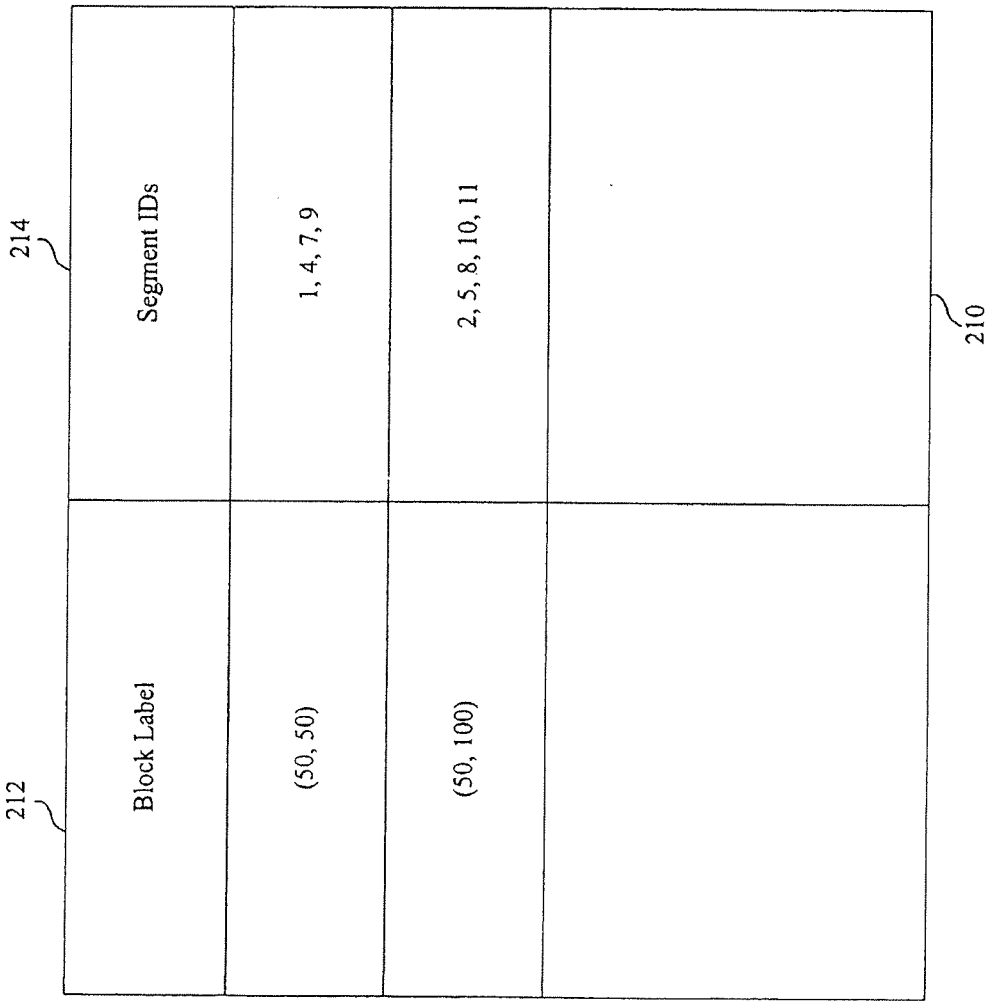


Fig. 15

EXHIBIT A
PAGE 21

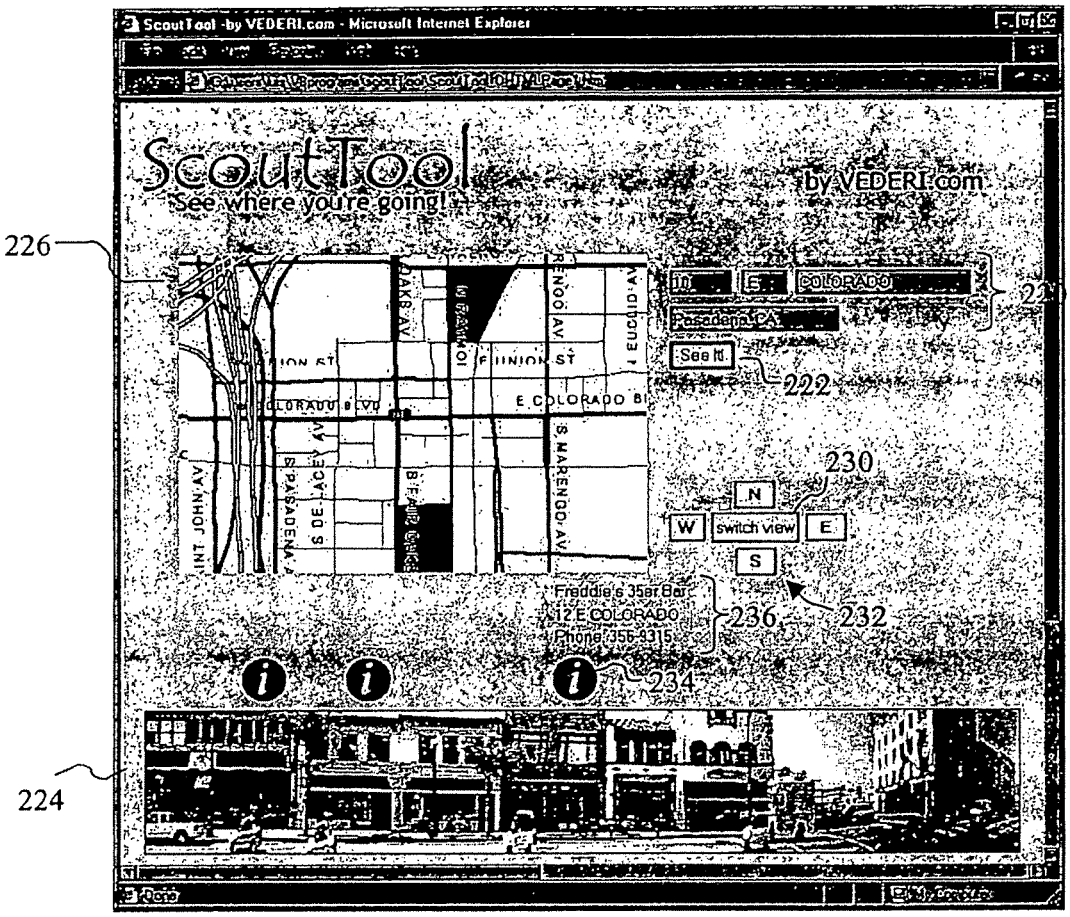


Fig.16

EXHIBIT A
PAGE 22

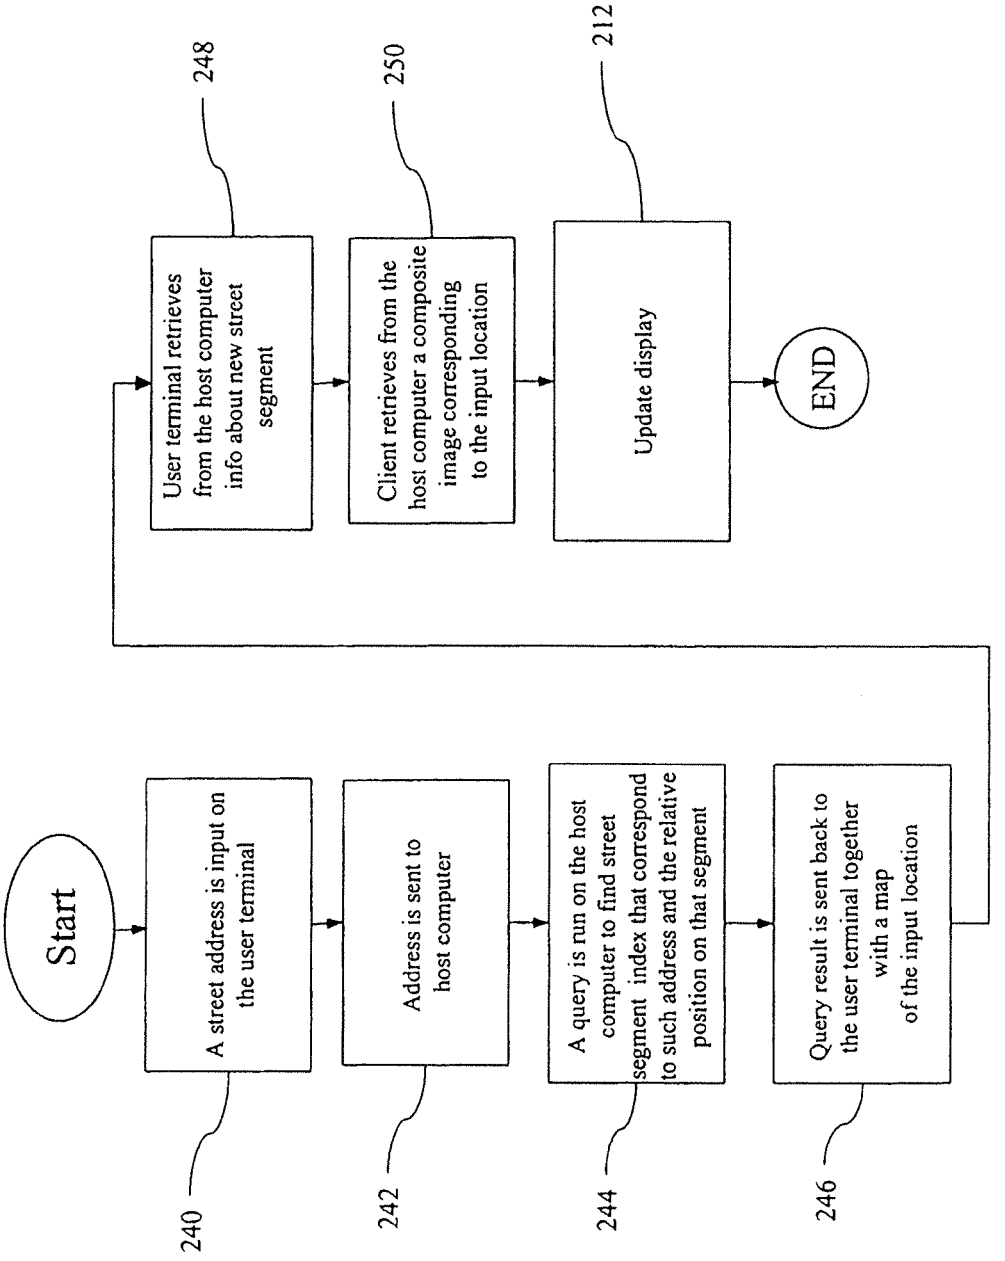


Fig.17

EXHIBIT A
PAGE 23

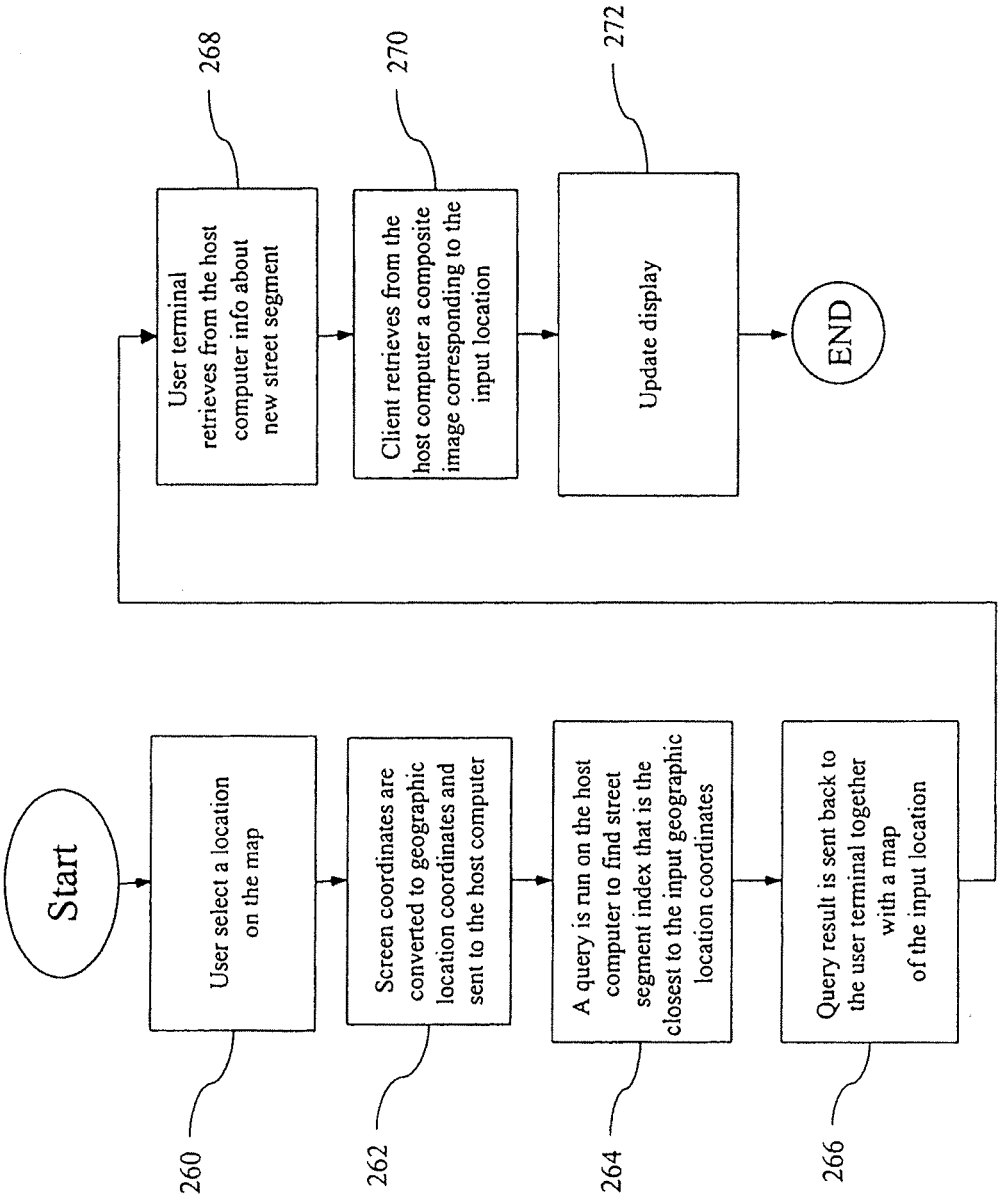


Fig.18

EXHIBIT A
PAGE 24

SYSTEM AND METHOD FOR CREATING, STORING, AND UTILIZING COMPOSITE IMAGES OF A GEOGRAPHIC LOCATION

CROSS-REFERENCE TO RELATED APPLICATION(S)

This application is a divisional of application Ser. No. 09/758,717 filed Jan. 11, 2001, now U.S. Pat. No. 6,895,126, issued May 17, 2005, which claims the benefit of U.S. provisional patent application No. 60/238,490, filed Oct. 6, 2000, the disclosures of which are hereby incorporated by reference in their entirety for all purposes.

FIELD OF THE INVENTION

This invention relates to visual databases, specifically to the creation and utilization of visual databases of geographic locations.

BACKGROUND OF THE INVENTION

There exist methods in the prior art for creating visual databases of geographic locations. However, such databases are of limited use due to the method of acquiring the imagery as well as the kind of imagery acquired. One particular method involves the taking of individual photographs of the location and electronically pasting the photographs on a polygonal mesh that provide the framework for a three-dimensional (3D) rendering of the location. This method, however, is time consuming and inefficient for creating large, comprehensive databases covering a substantial geographic area such as an entire city, state, or country.

Another method uses video technology to acquire the images. The use of video technology, especially digital video technology, allows the acquisition of the image data at a higher rate, reducing the cost involved in creating the image databases. For example, the prior art teaches the use of a vehicle equipped with a video camera and a Global Positioning System (GPS) to collect image and position data by driving through the location. The video images are later correlated to the GPS data for indexing the imagery. Nevertheless, such a system is still limited in its usefulness due to the lack of additional information on the imagery being depicted.

The nature of the acquired imagery also limits the usefulness of such a system. A single image acquired by the video camera contains a narrow field of view of a locale (e.g. a picture of a single store-front) due to the limited viewing angle of the video camera. This narrow field of view provides little context for the object/scene being viewed. Thus, a user of such an image database may find it difficult to orient himself or herself in the image, get familiar with the locale, and navigate through the database itself.

One way to increase the field of view is to use a shorter focal length for the video camera, but this introduces distortions in the acquired image. Another method is to increase the distance between the camera and the buildings being filmed. However, this may not be possible due to the limit on the width of the road and constructions on the opposite side of the street.

The prior art further teaches the dense sampling of images of an object/scene to provide different views of the object/scene. The sampling is generally done in two dimensions either within a plane, or on the surface of an imaginary sphere surrounding the object/scene. Such a sampling, however, is computationally intensive and hence cumbersome and inefficient in terms of time and cost.

Accordingly, there is a need for a system and method for creating a visual database of a comprehensive geographic area in a more time and cost efficient manner. Such a system should not require the reconstruction of 3D scene geometry nor the dense sampling of the locale in multiple dimensions. Furthermore, the images in the database should provide a wider field of view of a locale to provide context to the objects being depicted. The database should further correlate the images with additional information related to the geographic location and objects in the location to further enhance the viewing experience.

SUMMARY OF THE INVENTION

The present invention addresses and alleviates the above-mentioned deficiencies associated with the prior art. More particularly, the present invention is directed to a computer-implemented system and method for synthesizing images of a geographic location to generate composite images of the location. The geographic location may be a particular street in a geographic area with the composite images providing a view of the objects on each side of the street.

According to one aspect of the invention, an image recording device moves along a path recording images of objects along the path. A GPS receiver and/or inertial navigation system provides position information of the image recording device as the images are being acquired. The image and position information is provided to a computer to associate each image with the position information.

The computer synthesizes image data from the acquired images to create a composite image depicting a view of the objects from a particular location outside of the path. Preferably, the composite image provides a field of view of the location that is wider than the field of view provided by any single image acquired by the image recording device.

In another aspect of the invention, the path of the camera is partitioned into discrete segments. Each segment is preferably associated with multiple composite images where each composite image depicts a portion of the segment. The composite images and association information are then stored in an image database.

In yet another aspect of the invention, the image database contains substantially all of the static objects in the geographic area allowing a user to visually navigate the area from a user terminal. The system and method according to this aspect of the invention identifies a current location in the geographic area, retrieves an image corresponding to the current location, monitors a change of the current location in the geographic area, and retrieves an image corresponding to the changed location. A map of the location may also be displayed to the user along with information about the objects depicted in the image.

DESCRIPTION OF THE DRAWINGS

FIG. **1** is a schematic block diagram of a data acquisition and processing system for acquiring image and position data used to create composite images of a geographic location;

FIG. **2** is an illustration of a composite image created by the data acquisition and processing system of FIG. **1**;

FIG. **3** is a high-level flow diagram of the steps exercised by the data acquisition and processing system of FIG. **1** in creating and storing the composite images;

EXHIBIT A
PAGE 25

FIG. **4** is a flow diagram for synchronizing image sequences with position sequences of a recording camera according to one embodiment of the invention;

FIG. **5** is a flow diagram of an alternative embodiment for synchronizing image sequences with position sequences of a recording camera;

FIG. **6** is a block diagram of the data acquisition and processing system of FIG. **1** allowing a real-time synchronization of image and position data;

FIG. **7** is another embodiment for synchronizing image sequences with position sequences of a recording camera;

FIG. **8** is a flow diagram for segmenting and labeling a camera trajectory;

FIG. **9** is an illustration of a trajectory in a single camera scenario;

FIG. **10** is a flow diagram for creating a composite image of a segment of a camera's path;

FIG. **11** is a flow diagram for identifying and retrieving an optical column from an acquired image according to one embodiment of the invention;

FIG. **12** is a flow diagram for identifying and retrieving an optical column from an acquired image according to an alternative embodiment of the invention;

FIG. **13** is an illustration of an exemplary street segments table including street segments in a camera's trajectory;

FIG. **14** is an illustration of an exemplary image coordinates table for associating composite images with the street segments in the street segments table of FIG. **13**;

FIG. **15** is an illustration of an exemplary segment block table for allowing an efficient determination of a segment that is closest to a particular geographic coordinate;

FIG. **16** is an illustration of an exemplary graphical user interface for allowing the user to place requests and receive information about particular geographic locations;

FIG. **17** is a flow diagram of a process for obtaining image and location information of an express street address; and

FIG. **18** is a flow diagram of the process for obtaining image and location information of a location selected from a map.

DETAILED DESCRIPTION OF THE INVENTION

FIG. **1** is a schematic block diagram of a data acquisition and processing system for acquiring and processing image and position data used to create composite images of a geographic location. The composite images are created by synthesizing individual image frames acquired by a video camera moving through the location and filming the objects in its view. The composite images may depict on urban scene including the streets and structures of an entire city, state, or country. The composite images may also depict other locales such as a zoo, national park, or the inside of a museum, allowing a user to visually navigate the locale.

The data acquisition and processing system includes one or more image recording devices preferably taking the form of digital video cameras **10** moving along a trajectory/path and recording images on the trajectory on digital videotapes **12**. Other types of acquisition devices may also be used in combination to, or in lieu of, the digital cameras **10**, such as analog cameras. Furthermore, the video images may be recorded on optical, magnetic, or silicon video tapes, or on any other known types of storage devices that allow random access of particular image frames and particular video pixels within the image frames.

The data acquisition and processing system further includes a GPS receiver **16** for receiving position information from a set of GPS satellites **18** as the cameras **10** move along the trajectory. An inertial navigation system **20** including one or more accelerometers and/or gyroscopes also provides position information to the data acquisition and processing system. When the inertial navigation system **20** is used in conjunction with the GPS receiver **16**, a more accurate calculation of the position information may be produced.

In an alternative embodiment, position information is acquired using devices other than the inertial navigation system **20** and/or the GPS receiver **16**, such as via computer-vision-based algorithms that compute positions using video information from the video cameras **10**.

The video cameras **10** provide to a multiplexer **22** a frame number and time information for each image acquired via a communication link **24** preferably taking the form of a LANC™ port. The GPS receiver **16** and inertial navigation system **20** also provide position information to the multiplexer **22** via communication links **26***a*, **26***b*, preferably taking the form of RS-232 ports. The multiplexer **22** in turn transmits the received frame number, time information, and position data to a data acquisition computer **34** via a communication link **30**, which also preferably takes the form of an RS-232 port. The computer **34** stores in a trajectory database **36** the position data from the GPS receiver **16** and/or inertial navigation system **20** along with the frame number and time information from the video cameras **10**. This information is then used by a post-processing system **38** to create the composite images.

The post-processing system **38** preferably includes a post-processing computer **28** in communication with a video player **39**. The computer **28** preferably includes a video acquisition card for acquiring and storing the image sequences as the video player **39** plays the videotapes **12** of the acquired images. The computer **28** includes a processor (not shown) programmed with instructions to take the image and position data and create one or more composite images for storing into an image database **32**. The image database **32** is preferably a relational database that resides in a mass storage device taking the form of a hard disk drive or drive array. The mass storage device may be part of the computer **28** or a separate database server in communication with the computer.

In an alternative embodiment, the images are transferred directly to the data acquisition computer **34** as the images are being recorded. In this scenario, the computer **34** is preferably equipped with the video acquisition card and includes sufficient storage space for storing the acquired images. In this embodiment, the data acquisition computer **34** preferably contains program instructions to create the composite images from the acquired images.

In general terms, a composite image of a particular geographic location is created by using at least one video camera **10** recording a series of video images of the location while moving along a path. In the one camera scenario, the camera **10** is moved twice on the same path but in opposite directions to film the objects on both sides of the path. Movement to the camera **10** is provided by a base, platform, or motor vehicle moving at an average speed of preferably about 20 miles/hour to ensure a sufficient resolution in the resulting images. Video cameras with higher sampler rates may allow for faster acquisition speeds.

Preferably, the data acquisition and processing system uses four cameras **10** mounted on top of a moving motor vehicle. Two side cameras face each side of the path for filming objects viewed from the each side of the vehicle. A front and back cameras allow the filming of the objects

EXHIBIT A
PAGE 26

viewed from the front and back of the vehicle. The front and back cameras may be equipped with fish-eye lens for providing a wide-angle view of the path. A person skilled in the art should recognize, however, that additional cameras may be used to film the objects from different viewing directions. For example, a duodecahedron of cameras may be used to record the objects from all viewing directions. Furthermore, the side cameras need not face directly to the side of the street, but may face a slightly forward or backward direction to provide a look up or down of the path.

As the images acquired by the cameras **10** are recorded on the videotapes **12**, the frame number and time associated with the images are transferred to the data acquisition computer **34**. The images recorded on the videotapes **12** are later transferred to the post-processing computer **28** for further processing. Once the images are received, the computer **28** stores the image data in its memory in its original form or as a compressed file using one of various well-known compression schemes, such as MPEG.

As the camera **10** moves along the path and records the objects in its view, the GPS receiver **16** computes latitude and longitude coordinates using the information received from the set of GPS satellites **18** at selected time intervals (e.g. one sample every two seconds). The latitude and longitude coordinates indicate the position of the camera **10** during the recording of a particular image frame. The GPS satellite **18** also transmits to the GPS receiver **16** a Universal Time Coordinate (UTC) time of when the coordinates were acquired. The GPS receiver **16** is preferably located on the vehicle transporting the camera **10** or on the camera itself. The GPS data with the position sequences and UTC time information is then transferred to the computer **34** for storing in the trajectory database **36**.

In addition to the position information provided by the GPS receiver **16**, the inertial navigation system **20** also provides acceleration information to the computer **34** for independently deriving the position sequence of the camera **10**. Specifically, the one or more accelerators and gyroscopes in the inertial navigation system **20** monitor the linear and rotational acceleration rates of the camera **10** and transfer the acceleration data to the computer **34**. The computer **34** integrates the acceleration data to obtain the position of the camera **10** as a function of time. The computer **34** preferably combines the position derived from the acceleration information with the GPS position data to produce a more accurate evaluation of the position of the camera **10** at particular instances in time.

The post-processing computer **28** uses the image and position sequences to synthesize the acquired images and create composite images of the location that was filmed. The composite images preferably provide a wider field of view of the location than any single image frame acquired by the camera **10**. In essence, the composite images help provide a panoramic view of the location.

FIG. **2** is an illustration of a composite image **40** created from the image frames **42** acquired by the camera **10** while moving along an x-axis **58** direction. In creating the composite image **40**, the computer assumes a fictitious camera **44** located behind the actual camera **10** and identifies optical rays **46** originating from the fictitious camera. The location of the fictitious camera **44** depends on the desired field of view of the location being filmed. The further away the fictitious camera is placed from the objects along the x-axis **58**, the wider its field of view of the objects.

The computer also identifies optical rays **48** originating from the actual camera **10**. For each optical ray **46** from the fictitious camera **44**, the computer **28** selects an acquired image frame **42** that includes a corresponding optical ray **48** originating from the actual camera **10**. Image data from each selected image frame **42** is then extracted and combined to form the composite image. Preferably, the image data extracted from each image frame is an optical column that consists of a vertical set of pixels. The composite image is preferably created on a column-by-column basis by extracting the corresponding optical column from each image frame. Thus, to create a column P_i **50** in the composite image **40**, the computer locates an image frame **42***a* that was acquired when the camera **10** was located at X_i **52**. To locate this image frame **42***a*, the computer uses the GPS data and/or data from the inertial navigation system **20** to identify a time T_i **54** at which the camera **10** was in the location X_i **52**. Once the image frame **42***a* is identified, the computer **28** extracts the optical column **56** with an index $(P_i/N)*M$, where N is the total number of columns in the composite image **40** and M is the number of columns in the image frame **42***a*. The composite image **40** is stored in the image database **32**, preferably in JPEG format, and associated with an identifier identifying the particular geographic location depicted in the image. Furthermore, close-ups and fish-eye views of the objects are also extracted from the video sequences using well-known methods, and stored in the image database **32**. The unused data from the acquired images is then preferably deleted from the computer's memory.

FIG. **3** is a high-level flow diagram of the steps exercised by the data acquisition and processing system in creating and storing the composite images. In step **60**, the camera **10** acquires a series of images of a particular geographic location. At the same time, the GPS receiver **16** and/or inertial navigation system **20** acquires the position of the camera **10** while the images are being acquired. Because the time associated with the position information (position time) is likely to differ from the times of acquisition of the video images (video time), the computer **28**, in step **62**, synchronizes the image sequence with the position sequence. The synchronization is preferably a post-processing step that occurs after the image and position sequences have been acquired.

In step **64**, the computer **28** segments the trajectory taken by the recording camera **10** into multiple segments and labels each segment with identifying information about the segment. For example, if the camera traverses through various streets, the computer **28** segments the trajectory into multiple straight street segments and associates each street segment with a street name and number range. In step **66**, the computer **28** generates a series of composite images depicting a portion of each segment, and in step **68**, stores each composite image in the image database **32** along with the identifying information of the segment with which it is associated.

FIG. **4** is a more detailed flow diagram of step **62** for synchronizing the image sequences with the position sequences of the recording camera according to one embodiment of the invention. Although the process illustrated in FIG. **4** assumes that the position data is GPS data, a person skilled in the art should recognize that a similar process may be employed to synchronize the images to positions calculated using the inertial navigation system **20**.

The process starts, and in step **70**, a user of the system selects a landmark in the image sequence that appears in at least two distinct video frames. This indicates that the landmark was recorded once while the camera **10** was moving on one direction on the path, and again while the

EXHIBIT 4
PAGE 27

camera was moving in an opposite direction on the same path. The landmark may be, for example, a tree in a lane divider.

In step **72**, a time interval T is measured in the image sequence between the two passings of the landmark. In step **74**, the computer **28** uses the GPS data to compute a function for determining the time interval between successive passes of any point along the path. The function is then used to find, for each point x on the path, a time of return Tr(x) which measures the lapse of time between the two passings of each point. In step **76**, a point is identified for which Tr(x)=T. The identified point provides the GPS position of the landmark and hence, a GPS time associated with the landmark. Given the GPS time, a difference between the GPS time and the video time associated with the landmark may be calculated for synchronizing any image frame acquired at a particular video time to the GPS position of the camera at a particular GPS time.

FIG. **5** is a flow diagram of an alternative embodiment for synchronizing the image sequences with GPS position information. As in FIG. **4**, the process illustrated in FIG. **5** also identifies, in step **80**, a landmark in the image sequence that appears in at least two distinct image frames. In step **82**, a time phase is initialized to an arbitrary value using the camera time stamp. In step **84**, the computer **28** measures the distance traveled between the two points on the path that correspond to the time instants in the image sequence where the landmark is seen from the two sides of the path. In step **86**, an inquiry is made as to whether the distance has been minimized. If the answer is NO, the time phase is modified in step **88**, and the process returns to step **84** where the distance is measured again.

In another embodiment, the synchronization does not occur as a post-production process, but occurs in real-time as the image and position sequences are acquired. FIG. **6** is a block diagram of a portion of the data acquisition and processing system of FIG. **1** allowing a real-time synchronization of image and position data. A UTC clock generator **90** provides to the data acquisition computer **34** the UTC time associated with each GPS position of the recording camera **10** as the camera moves along the path. The video time produced by a camera clock **92** is also provided to the data acquisition computer **34** via the communications port **24**. A UTC card **94** on the computer **34** correlates the video time to the UTC time. Thus, the video image acquired at the video time may be correlated to the GPS position of the camera during the recording of the image.

FIG. **7** is yet another embodiment for synchronizing the image sequences with the GPS position of the recording camera **10**. In step **100**, the post-processing computer **28** computes the temporal variation in the image values (i.e. optical flow) of the bottom pixel rows in the image sequence. Thus, the average velocity of each of the pixels in the row may be obtained. In step **102**, the tangential velocity of the camera **10** is obtained from the GPS reading. The average velocity for the computed pixels is directly proportional to the vehicle tangential velocity. Thus, in step **104**, the time phase between the position and video sequences may be determined as a time delay maximizing the alignment of local maxima and local minima between the average pixel velocity and the vehicle tangential velocity. This time phase is then read out in step **106**.

FIG. **8** is a more detailed flow diagram of step **64** of FIG. **3** for segmenting the trajectory followed by one or more recording cameras **10** and labeling the segments with an identifier. In the one camera scenario, the camera is moved along the path making a right turn at each intersection until a block **112** has been filmed, as is illustrated in FIG. **9**. The camera then moves to a second block **114** to film the objects on that block. Thus, a particular path **110** adjoining the two blocks **112**, **114** is traversed twice on opposite directions allowing the filming of the objects on each side of the path.

In step **120**, the post-processing computer **28** segments the camera's trajectory into straight segments by detecting the points of maximum curvature (i.e. where the turns occur). In this regard, the latitude and longitude coordinates provided by the GPS receiver **16** are converted into two-dimensional Mercator coordinates according to well-known methods. A spline interpolation is then obtained from the two-dimensional Mercator coordinates and the resulting spline function is parameterized in arc-length. The computer **28** obtains a new sampling of the coordinates from the spline function by uniformly sampling the coordinates in an arc-length increment of about one meter while detecting the points in the new sequence where a turn was made. The place where a turn occurs is assumed to be the place of an intersection of two segments.

Preferably, the computer **28** performs a singular value decomposition computation according to well-known methods to detect the turns. In this regard, the computer selects an observation window containing N sample points that is moved along the spline for calculating an index indicative of the overall direction (i.e. alignment) of the points in the window. The higher the index, the less aligned the points, and the more likely that the camera was making a turn at those points. The points are least aligned at the center of a turn, and thus, the computer selects as a turn coordinate a point in the observation window where the index is at a local maximum. The computer **28** gathers all the points whose indexes correspond to local maxima and stores them into an array of turn coordinates.

In step **122**, the computer **28** determines the center of an intersection by grouping the turn coordinates into clusters where turns that belong to the same cluster are turns made on the same intersection. An average of the turn coordinates belonging to the same cluster is then calculated and assigned as the intersection coordinate.

The endpoints of each straight segment are identified based on the calculated intersection coordinates. In this regard, an intersection coordinate at the start of the segment is identified and assigned to the segment as a segment start point (the "From" intersection coordinate). An intersection coordinate at the end of the segment is also identified and assigned to the segment as a segment end point (the "To" intersection coordinate).

In the scenario where at least two side cameras are utilized, each camera films the objects on each side of the path during the first pass on the path. Thus, unlike the single camera scenario where a turn is made at each intersection to move the camera along the same path twice but in opposite directions, a turn is not made at each intersection in the two camera scenario. Therefore, instead of identifying the points of maximum curvature for determining the intersection coordinates, the intersection coordinates are simply detected by tracking the GPS data and identifying where the segments orthogonally intersect.

The computer **28** associates the calculated segments with information obtained from a geographic information database **128** and stores it into a segments table as is described in further detail below. In the scenario where composite images of a city are created, the geographic information database **128** includes a map of the city where the endpoints of each street segment on the map are identified by latitude and longitude information. The database **128** further

EXHIBIT 4
PAGE 23

includes a street name and number range for each street segment on the map. Such databases are commercially available from third parties such as Navigation Technologies and Etak, Inc.

In correlating the segments of the camera's trajectory with the segments in the geographic information database **128**, the computer, in step **124**, determines the correspondences between the "From" and "To" coordinates calculated for the trajectory segment with intersection coordinates of the segments in the database. The computer **28** selects the segment in the geographic information database **128** which endpoints are closest to the computed "From" and "To" coordinates, as the corresponding segment.

In step **126**, the computer labels each trajectory segment with information that is associated with the corresponding segment in the database **128**. Thus, if each segment in the database **128** includes a street name and number, this information is also associated with the trajectory segment.

FIG. **10** is a more detailed flow diagram of step **66** of FIG. **3** for creating a composite image of a segment of the camera's path according to one embodiment of the invention. In step **130**, the computer **28** computes the arc length coordinate Xc of the center of the segment which is then set as the center of the composite image. In step **132**, the computer identifies the optical rays **46** (FIG. **2**) originating from the fictitious camera **44** by computing an array of equidistant positions X1, X2, . . . , Xn along the camera's trajectory, centered around Xc. The number of computed positions preferably depend on the number of optical columns that are to be created in the composite image.

In step **134**, the computer **28** uses the position information obtained from the GPS receiver **16** and/or inertial navigation system **20** to map each position Xi on the trajectory to a position time Ti. Thus, if GPS data is used to determine the camera's position, each position Xi of the camera **10** is mapped to a UTC time.

In step **136**, the computer **28** uses the time phase information computed in the synchronization step **62** of FIG. **3** to convert the position times to video times. For each identified video time, the computer **28**, in step **138**, identifies an associated image frame and extracts a column of RGB pixel values from the frame corresponding to the optical rays **46** originating from the fictitious camera **44**. In step **140**, the column of RGB pixel values are stacked side by side to generate a single image bitmap forming the composite image.

FIG. **11** is a more detailed flow diagram of step **138** for identifying and retrieving a column of RGB pixel values for a particular video time Ti according to one embodiment of the invention. In step **150**, the computer **28** identifies an image frame with frame index Fi acquired at time Ti. Because the image frames are acquired at a particular frame rate (e.g. one frame every 1/30 seconds), there may be a particular time Ti for which an image frame was not acquired. In this scenario, the frame closest to time Ti is identified according to one embodiment of the invention.

In step **152**, the current position of the image sequence is set to the image frame with index Fi, and the frame is placed into a frame buffer. In step **154**, a column in the image frame with an index i is read out from the frame buffer.

FIG. **12** is a flow diagram of an alternative embodiment for identifying and retrieving a column of RGB pixel values for a particular video time Ti. If an image frame was not acquired at exactly time Ti, the computer, in step **160**, identifies 2*N image frames that are closest to time Ti, where N>1. Thus, at least two image frames closest to time Ti are identified. In step **162**, the computer computes an optical flow field for each of the 2*N image frames and in step **164**, infers the column of RGB values for a column i at time Ti. In the situation where only two image frames are used to compute the optical flow, the computer identifies for each pixel in the first image frame a position X1 and a position time T1. A corresponding pixel in the second frame is also identified along with a position X2 and a position time T2. The position X' of each pixel at time Ti is then computed where $X'=X1+((Ti-T1)/(T2-T1))*(X2-X1)$. Given the position of each pixel at time Ti, a new frame that corresponds to time Ti may be inferred. The computer **28** may then extract the column of RGB values from the new frame for a column i.

Preferably, the computer **28** creates multiple composite images at uniform increments (e.g. every 8 meters) along a segment. In the scenario where the composite images are created for street segments, the composite images depict the view of the objects on each side of the street. The composite images are then stored in the image database **28** along with various tables that help organize and associate the composite images with street segment information.

According to one embodiment of the invention, the image database **32** includes composite images of a geographic area which together provide a visual representation of at least the static objects in the entire area. Thus, if the geographic area is a particular city, the composite images depict the city on a street-by-street basis, providing a visual image of the buildings, stores, apartments, parks, and other objects on the streets. The system further includes an object information database with information about the objects being depicted in the composite images. If the geographic area being depicted is a city, the object information database contains information about the structures and businesses on each city street. In this scenario, each record in the object information database is preferably indexed by a city address.

FIG. **13** is an illustration of an exemplary street segments table **170** including the street segments in the camera's trajectory. The table **170** suitably includes multiple entries where each entry is a record specific to a particular street segment. A particular street segment record includes an index identifying the street segment (segment ID) **172** as well as the corresponding street name **174** obtained from the geographic information database **128** (FIG. **12**). A particular street segment record also includes the direction of the street (North, South, East, or West) **176** with respect to a main city street referred to as a city hub. The direction information generally appears in an address in front of the street name. A city, state, and/or country fields may also be added to the table **170** depending on the extent of the geographic area covered in the image database **32**.

A street segment record includes the endpoint coordinates **178** of the corresponding street segment in the geographic information database **128**. An array of segment IDs corresponding to street segments adjacent to the segment start point are identified and stored in field **180** along with the direction in which they lie with respect to the start point (e.g. North, South, East, or West). Similarly, an array of segment IDs corresponding to street segments adjacent to the segment end point are also identified and stored in field **182**. These segments are also ordered along the direction in which they lie.

In addition to the above, a street segment record includes a distance of the start of the trajectory segment from the city hub **184**. The city hub generally marks the origin of the streets from which street numbers and street directions (North, South, East, or West) are determined. Street numbers are generally increased by two at uniform distances (e.g.

EXHIBIT A
PAGE 29

every 12.5 feet) starting from the hub. Thus the distance from the hub allows a computation of the street numbers on the street segment. In a one camera situation where each segment is traversed twice, the distance from the hub is computed for each camera trajectory. In a multiple camera scenario, however, only one distance is computed since the camera traverses the segment only once.

Also included in a street segment record is a length of the trajectory segment. Such a length is computed for each trajectory in a one camera **10** scenario because the movement of the camera **10** is not identical during the two traversals of the segment.

Each street segment record **170** further includes an offset value **188** for each side of the street. The offset is used to correct the street numberings computed based on the distance information. Such a computation may not be accurate if, for instance, there is an unusually wide structure on the segment that is erroneously assigned multiple street numbers because it overlaps into the area of the next number assignment. In this case, the offset is used to decrease the street numbers on the segment by the offset value.

FIG. **14** is an illustration of an exemplary image coordinates table **200** for associating the composite images with the street segments in the street segments table **170**. The image coordinates table **200** includes a plurality of composite image records where each record includes a segment ID **202** of the street segment being depicted in the composite image. In addition, each composite image record includes information of the side of the street segment **204** being depicted. For example, the side may be described as even or odd based on the street numbers on the side of the street being depicted. Each composite image entry also includes a distance from the segment origin to the center Xc of the composite image **206** indicating the position along the street segment for which the image was computed. The distance information is used to retrieve an appropriate composite image for each position on the street segment.

FIG. **15** is an illustration of an exemplary segment block table **210** for allowing an efficient determination of a segment ID that is closest to a particular geographic coordinate. In this regard, the geographic area depicted in the image database **32** is preferably partitioned into a grid of square blocks where each block includes a certain number of street segments. The blocks are assigned block labels preferably corresponding to the center longitude and latitude coordinates of the block. The block labels are stored in a block label field **212**. Associated with each block label are segment IDs **214** corresponding to the street segments in the block. Given the coordinates of a particular geographic location, the block closest to the given coordinates may be identified to limit the search of street segments to only street segments within the block.

In a particular use of the system, a user places inquiries about a location in a geographic area depicted in the image database **32**. For example, the user may enter an address of the location, enter the geographic coordinates of the location, select the location on a map of the geographic area, or specify a displacement from a current location. Preferably, the user has access to a remote terminal that communicates with a host computer to service the user requests. The host computer includes a processor programmed with instructions to access the image database **32** in response to a user request and retrieve composite images about the particular location. The processor is also programmed with instructions to access the geographic and object information databases to retrieve maps and information on the businesses in the geographic area. The retrieved data is then transmitted to the requesting remote user terminal for display thereon.

The remote user terminals may include personal computers, set-top boxes, portable communication devices such as personal digital assistants, and the like. The visual component of each remote user terminal preferably includes a VGA or SVGA liquid-crystal-display (LC) screen, an LED display screen, or any other suitable display apparatus. Pressure sensitive (touch screen) technology may be incorporated into the display screen so that the user may interact with the remote user terminal by merely touching certain portions of the screen. Alternatively, a keyboard, keypad, joystick, mouse, and/or remote control unit is provided to define the user terminal's input apparatus.

Each remote user terminal includes a network interface for communicating with the host computer via wired or wireless media. Preferably, the communication between the remote user terminals and the host computer occurs over a wide area network such as the Internet.

In an alternative embodiment of the invention, the image, geographic information, and object information databases reside locally at the user terminals in a CD, DVD, hard disk drive, or any other type of mass storage media. In this embodiment, the user terminals include a processor programmed with instructions to receive queries from the user about a particular geographic location and retrieve composite images and associated information in response to the user queries.

FIG. **16** is an illustration of an exemplary graphical user interface (GUI) for allowing the user to place requests and receive information about particular geographic locations. The GUI includes address input fields **220** allowing the user to enter the street number, street name, city and state of the particular location he or she desires to view. Actuation of a "See It" button **222** causes the user terminal to transmit the address to the host computer to search the image and geographic location databases **32**, **128** for the composite image and map corresponding to the address. Furthermore, the host computer searches the object information database to retrieve information about the objects depicted in the composite image.

The retrieved composite image and map are respectively displayed on the display screen of the requesting user terminal in a map area **226** and an image area **224**. The map is preferably centered around the requested address and includes a current location cursor **228** placed on a position corresponding to the address. The current location identifier **228** may, for instance, take the shape of an automobile.

The composite image displayed on the image area **224** provides a view of a side of the street (even or odd) based on the entered street number. The user may obtain information about the objects being visualized in the composite image by actuating one of the information icons **234** above the image of a particular object. In displaying the information icons **234**, a range of street addresses for the currently displayed image is computed. The listings in the object information database with street numbers that fall inside the computed range are then selected and associated with the information icons **234** displayed on top of the image of the object.

If the objects are business establishments, the information displayed upon actuating the information icons **234** may include the name, address, and phone number **236** of the establishment. This information is preferably displayed each time the user terminal's cursor or pointing device is passed above the icon. In addition, if the establishment is associated with a particular Web page, the information icon **234** func-

EXHIBIT A
PAGE 30

tions as a hyperlink for retrieving and displaying the Web page, preferably on a separate browser window.

The user may obtain a close-up view of a particular object in the composite image by selecting the object in the image. A close-up view of the object is then obtained by computing the distance of the selected object from the origin of the street segment where they object lies. The location on the segment of the closest close-up image is computed and retrieved from the image database **32**. The close-up image is then provided in the image area **224** or in a separate browser window.

A "Switch View" button **230** allows the user to update the current composite image providing a view of one side of the street with a composite image of the other side of the street. In a multiple camera scenario, each actuation of the "Switch View" button **230** provides a different view of the street. The current view is preferably identified by a direction identifier (not shown) on or close to the current location identifier **228**. For instance, one side of the current location identifier **228** may be marked with a dot or an "X" to identify the side of the street being viewed. Alternatively, an arrow may be placed near the current location identifier **228** to identify the current viewing direction.

The composite image is also updated as the user navigates through the streets using the navigation buttons **232**. From a current location, the user may choose to navigate north, south, west, and east by actuating the corresponding buttons. Preferably, only the navigation buttons corresponding to the possible direction of motions from the current position are enabled. As the user actuates one of the buttons, the current position is incremented by a predetermined amount, currently set to eight meters, to the next available composite image on the current or adjacent segment. The image area **224** is then updated with the new composite image.

FIG. **17** is a flow diagram of the process executed by the host computer for obtaining image and location information of an express street address entered in the address input fields **220**. A similar process is executed by the user terminal in the embodiment where the location and image information are stored locally at the user terminal.

The process starts, and in step **240**, the user requests information about a particular street address by entering the address in the address input fields **220**. In step **242**, the address is transmitted to the host computer preferably over a wide area network such as the Internet. In step **244**, a query is run on the host computer to locate the street segment index in the street segment table **170** (FIG. **13**) corresponding to the requested address. In this regard, the computer searches the street segment table **170** for street segments that match the desired street name **174** as well as a city, state, or country if applicable. For each street segment matching the street name, the computer computes the starting street number on that segment preferably based on the following formula:

$$\text{Start Number} = (\text{round}((\text{Distance from Hub} + \text{Offset})/K)*2)$$

The distance from the hub **184** and offset **188** values are obtained from the street segment table **170**. The value K is the distance assumed between any two street numbers on the segment.

The ending street number on the street segment is also calculated using a similar formula:

$$\text{End Number} = (\text{round}((\text{Distance from Hub} + \text{Offset} + \text{length})/K)*2)$$

The length is the length **186** value obtained from the street segment table **170**.

Once the start and end street numbers are calculated for a particular street segment, the computer determines whether the requested street number lies within the start and end street numbers. If it does, the computer returns the corresponding segment ID **172**. Furthermore, the computer determines the distance of the requested street number from the start of the street segment for determining the position of the street number on the street segment.

In step **246**, the host computer transmits the query result to the requesting user terminal along with a map of the input location retrieved from the geographic information database **128**. In step **248**, the requesting user terminal downloads from the host computer a record from the street segments table **170** corresponding to the identified street segment. Furthermore, the user terminal also retrieves the computed start and end street numbers of the street segment, a list of computed composite images for both sides of the street segment in the image coordinates table **200** (FIG. **14**), and information of the objects visible on the street segment in the object information database.

In step **250**, the user terminal downloads a composite image for the appropriate side of the street from the host computer that has a distance from the origin of the street segment to the center of the composite image **206** (FIG. **14**) that is closest to the distance of the desired street number from the origin. The display on the user terminal is then updated in step **252** with the new location and image information.

FIG. **18** is a flow diagram of the process executed by the host computer for obtaining image and location information of a particular location selected on the map displayed in the map area **226**. A similar process is executed by the user terminal in the embodiment where the location and image information are stored locally at the user terminal.

The process starts, and in step **260**, the user requests information about a particular street address by selecting a location on the map. In step **262**, the map coordinates are converted from screen coordinates to geographic location coordinates (x,y) and transmitted to the host computer preferably over the Internet. In step **244**, a query is run on the host computer to locate the street segment index in the street segment table **170** (FIG. **13**) corresponding to the geographic location coordinates. In this regard, the computer searches the segment block table **210** (FIG. **15**) for a block that includes the street segment corresponding to the input location. In order to locate such a block, the computer rounds the identified geographic location coordinates based preferably on the size of the block. The rounded (x,y) coordinates may thus be represented by ((round (x/B))*B, (round y/B)*B)), where B is the length of one of the block sides. The computer then compares the rounded number to the coordinates stored in the block label field **212** and selects the block with the label field **212** equal to the rounded coordinate. Once the appropriate block is identified, the computer proceeds to retrieve the segment IDs **214** associated with the block. The geographic coordinates of the desired location are then compared with the endpoint coordinates of each street segment in the block for selecting the closest street segment.

In step **266**, the segment ID of the closest street segment is returned to the user terminal. Additionally, a new map of the desired location may be transmitted if the previous map was not centered on the desired location.

In step **268**, the requesting user terminal downloads from the host computer a street segment record in the street segments table **170** corresponding to the identified street segment. The user terminal also retrieves the calculated start

EXHIBIT A
PAGE 31

and end street numbers of the street segment, a list of computed composite images for both sides of the street the segment in the image coordinates table **200** (FIG. **14**), and information of the objects visible on the street segment in the object information database.

In step **270**, the user terminal downloads the composite image corresponding to the geographic coordinates of the input location. To achieve this, the geographic coordinates are converted to a distance along the identified street segment. The user terminal downloads a composite image that has a distance from the origin of the street segment to the center of the composite image **206** (FIG. **14**) that is closest to the distance of the input location from the origin. The display on the user terminal is then updated in step **272** with the new location and image information.

Although this invention has been described in certain specific embodiments, those skilled in the art will have no difficulty devising variations which in no way depart from the scope and spirit of the present invention. For example, the composite images may be made into streaming video by computing the composite images at small increments along the path (e.g. every 30 cm). Furthermore, the composite images may be computed at several resolutions by moving the fictitious camera **44** (FIG. **2**) closer or further away from the path to decrease or increase its field of view and provide the user with different zoom levels of the image.

Variation may also be made to correct any distortions in the perspective of the composite image along the vertical y-axis direction. The extraction of the optical columns from the acquired image frames may introduce such a distortion since the sampling technique used along the horizontal x-axis direction is not applied along the y-axis. Such a distortion may be corrected by estimating the depth of each pixel in the composite image using optical flow. The aspect ratio of each pixel may be adjusted based on the distance of the object visualized in the pixel. The distortion may also be corrected by acquiring images from an array of two or more video cameras **10** arranged along the vertical y-axis in addition to the cameras in the horizontal axis.

The described method of generating composite images also relies on an assumption that the camera's trajectory is along a straight line. If this is not the case and the vehicle carrying the camera makes a lane change, makes a turn, or passes over a bump, the choice of the optical column extracted from a particular image frame may be incorrect. The distortion due to such deviations from a straight trajectory may, however, be corrected to some degree using optical flow to detect such situations and compensate for their effect.

It is therefore to be understood that this invention may be practiced otherwise than is specifically described. Thus, the present embodiments of the invention should be considered in all respects as illustrative and not restrictive, the scope of the invention to be indicated by the appended claims and their equivalents rather than the foregoing description.

What is claimed is:

1. In a system including an image source and a user terminal having a screen and an input device, a method for enabling visual navigation of a geographic area from the user terminal, the method comprising:

receiving a first user input specifying a first location in the geographic area;

retrieving from the image source a first image associated with the first location, the image source providing a plurality of images depicting views of objects in the geographic area, the views being substantially elevations of the objects in the geographic area, wherein the images are associated with image frames acquired by an image recording device moving along a trajectory;

receiving a second user input specifying a navigation direction relative to the first location in the geographic area;

determining a second location based on the user specified navigation direction; and

retrieving from the image source a second image associated with the second location.

2. The method of claim **1**, wherein image source resides at a remote site and receives a request via a communications network for an image corresponding to the first or second location, and transmits the retrieved image to the user terminal via the communications network.

3. The method of claim **1**, wherein the image source resides at the user terminal and the method further comprises:

displaying the image corresponding to the first location on the screen of the user terminal; and

updating the image on the screen with the image corresponding to the second location.

4. The method of claim **1** further comprising retrieving a map of a portion of the geographic area for displaying the map on the screen of the user terminal.

5. The method of claim **4** further comprising:

displaying an icon on the map associated with an object in the portion of the geographic area covered by the map;

receiving a user selection of the icon; and

identifying the second location based on the user selection.

6. The method of claim **4**, wherein the first or second location is identified by a user selection of the location on the map using the input device.

7. The method of claim **1**, wherein the first location is identified by a specific address entered by the user using the input device.

8. The method of claim **1**, wherein the retrieving of the image corresponding to the first or second location comprises:

identifying a street segment including the first or second location;

identifying a position on the street segment corresponding to the first or second location; and

identifying an image associated with said position.

9. The method of claim **8**, wherein the image simulates a view of objects on one side of the street segment and the method further comprises retrieving a second image depicting a view of objects on an opposite side of the street segment in response to a user request.

10. The method of claim **1** further comprising:

receiving a user selection of a portion of the image; and

displaying an alternate view of the selected portion.

11. The method of claim **1** further comprising:

displaying an indicia that information is available about an object in the image; and

retrieving information about the object in response to a user request to display the information on the screen of the user terminal.

12. The method of claim **1** further comprising:

displaying a navigation button on the screen of the user terminal; and

retrieving the image associated with the second location from the image source upon actuation of the navigation button using the user input device.

13. The method of claim **12**, wherein the navigation button indicates direction of motion within a displayed map.

EXHIBIT A
PAGE 32

14. The method of claim 12, wherein the navigation button indicates direction of motion with respect to the displayed image.

15. The method of claim 14, wherein the direction of motion includes one of panning left or right, rotating left or right, and viewing a direction opposite of a displayed direction.

16. The method of claim 1 further comprising:

displaying a map of a portion of the geographic area;

identifying the first location with an identifier on the map; and

advancing the identifier on the map from the first location to the second location.

17. The method of claim 1, wherein the plurality of images are substantially frontal views of the objects within the geographic area.

18. The method of claim 1, wherein the image source is an image database.

19. In a system including an image source and a user terminal having a screen and an input device, a method for enabling visual navigation of a geographic area from the user terminal, the method comprising:

accessing a plurality of images from the image source, the images representing objects within the geographic area;

identifying a current location in the geographic area;

retrieving from the image source an image corresponding to the current location;

monitoring a change of the current location in the geographic area; and

retrieving from the image source an image corresponding to the changed location, wherein each retrieved image is a composite image created by processing a plurality of image frames acquired from an image recording device moving through the geographic area.

20. A system for enabling visual navigation of a geographic area from a user terminal, the system comprising:

means for accessing an image source providing a plurality of images depicting views of objects in the geographic area, the views being substantially elevations of the objects in the geographic area, wherein the images are associated with image frames acquired by an image recording device moving along a trajectory;

means for receiving a first user input specifying a first location in the geographic area;

means for retrieving from the image source a first image associated with the first location;

means for receiving a second user input specifying a navigation direction relative to the first location in the geographic area;

means for determining a second location based on the user specified navigation direction; and

means for retrieving from the image source a second image associated with the second location.

21. The system of claim 20, wherein the image source resides at a remote site and includes means for receiving a request for an image corresponding to the first or second location, and means for transmitting the retrieved image to the user terminal.

22. The system of claim 20, wherein the image source resides at the user terminal and the system further comprises:

a display screen for displaying the image of the first location; and

means for updating the image on the screen with the image corresponding to the second location.

23. The system of claim 20 further comprising means for retrieving a map of a portion of the geographic area for displaying the map on the screen of the user terminal.

24. The system of claim 23 further comprising:

means for displaying an icon on the map associated with an object in the portion of the geographic area covered by the map;

means for receiving a user selection of the icon; and

means for identifying the second location based on the user selection.

25. The system of claim 23, wherein the first or second location is identified by a user selection of a portion of the map.

26. The system of claim 20, wherein the first location is identified by a specific address entered by the user using an input device.

27. The system of claim 20, wherein the means for retrieving the image corresponding to the first or second location comprises:

means for identifying a street segment including the first or second location;

means for identifying a position on the street segment corresponding to the first or second location; and

means for identifying an image associated with said position.

28. The system of claim 27, wherein the image simulates a view of objects on one side of the street segment and the system further comprises means for retrieving a second image depicting a view of objects on an opposite side of the street segment in response to a user request.

29. The system of claim 20 further comprising means for processing a plurality of image frames acquired from the image recording device moving through the geographic area.

30. The system of claim 20 further comprising:

means for receiving a user selection of a portion of the image; and

a display displaying an alternate view of the selected portion.

31. The system of claim 20 further comprising:

means for indicating that information is available about an object in the image;

means for retrieving information about the object in response to a user request to display the information on the screen of the user terminal.

32. The system of claim 20 further comprising:

a navigation button indicating the navigation direction.

33. The system of claim 32, wherein the navigation button indicates the navigation direction within a displayed map.

34. The system of claim 32, wherein the navigation button indicates the navigation direction with respect to the displayed image.

35. The system of claim 34, wherein the navigation direction includes one of panning left or right, rotating left or right, and viewing a direction opposite of a displayed direction.

36. The system of claim 20 further comprising:

means for displaying a map of a portion of the geographic area;

means for identifying the first location on the map; and

means for identifying the second location on the map based on the user-selected navigation direction.

37. The system of claim 20, wherein the plurality of images are substantially frontal views of the objects within the geographic area.

38. In a system including an image database and a user terminal having a screen and an input device, a method for

EXHIBIT A
PAGE 33

enabling visual navigation of a geographic area from the user terminal, the method comprising:

receiving a first user input specifying a first location in the geographic area;

retrieving from the image database a first set of image frames associated with the first location, the image database storing a plurality of image frames depicting views of objects in the geographic area, the views being substantially elevations of the objects in the geographic area, wherein the image frames are acquired by an image recording device moving along a trajectory;

generating a first image of the first location based on the first set of image frames;

receiving a second user input specifying a navigation direction relative to the first location in the geographic area;

determining a second location based on the user specified navigation direction;

retrieving from the image database a second set of image frames associated with the second location; and

generating a second image of the second location based on the second set of image frames.

* * * * *

EXHIBIT A
PAGE 34

UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF CORRECTION

PATENT NO. : 7,239,760 B2
APPLICATION NO. : 11/130004
DATED : July 3, 2007
INVENTOR(S) : Enrico Di Bernardo

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

On the Title Page, item

(76) Inventors, lines 1-2	Delete "783 N. Craig Ave., Pasadena, (CA) (US) 91104", Insert --835 E. Meda Avenue, Glendora, CA (US) 91741--
(76) Inventors, lines 3-4	Delete "1133 Pine St. #109, South Pasadena, CA (US) 91030", Insert --273 Waverly Drive, Pasadena, CA (US) 91105--

Title page, item (57)

ABSTRACT, line 1	After "method", Insert --for--
(57) ABSTRACT, line 2	Delete "provide", Insert --provides--

In the Drawings

Fig. 16, Sheet 16 of 18	Delete Drawing Sheet 16 of 18 and substitute therefore the Drawing Sheet, consisting of Fig. 16, as shown on the attached page

In the Specification

Column 3, line 50	Delete "on", Insert --an--
Column 4, line 66	Delete "A front", Insert --Front--
Column 15, line 2	After "street", Insert --,--

In the Claims

Column 16, line 10, Claim 2	After "wherein", Insert --the--
Column 16, line 36, Claim 7	Delete "the user", Insert --a user--

EXHIBIT A
PAGE 35

UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF CORRECTION

PATENT NO. : 7,239,760 B2
APPLICATION NO. : 11/130004
DATED : July 3, 2007
INVENTOR(S) : Enrico Di Bernardo

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Column 16, line 46, Claim 9	After "image", Insert --associated with said position--
Column 16, line 48, Claim 9	Delete "a second image", Insert --an image--
Column 16, line 52, Claim 10	Delete "the image", Insert --the first or second image--
Column 16, line 56, Claim 11	Delete "the image", Insert --the first or second image--
Column 16, line 65, Claim 12	Delete "user"
Column 17, lines 2-3, Claim 14	Delete "to the displayed image", Insert --to a displayed image--
Column 18, line 3, Claim 23	Delete "the screen", Insert --a screen--
Column 18, line 15, Claim 26	Delete "the user", Insert --a user--
Column 18, line 26, Claim 28	After "image", Insert --associated with said position--
Column 18, lines 28-29, Claim 28	Delete "retrieving a second image", Insert --retrieving an image--
Column 18, lines 36-37, Claim 30	Delete "the image", Insert --the first or second image--
Column 18, line 42, Claim 31	Delete "the image", Insert --the first or second image--
Column 18, line 45, Claim 31	Delete "the screen", Insert --a screen--

EXHIBIT A
PAGE 36

UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF CORRECTION

PATENT NO. : 7,239,760 B2
APPLICATION NO. : 11/130004
DATED : July 3, 2007
INVENTOR(S) : Enrico Di Bernardo

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Column 18, lines 51-52, Claim 34	Delete "to the displayed image", Insert --to a displayed image--
Column 18, line 62, Claim 36	Delete "user-selected navigation direction", Insert --user-specified navigation direction--

Signed and Sealed this

Fourth Day of August, 2009

John Doll

JOHN DOLL
Acting Director of the United States Patent and Trademark Office

EXHIBIT A
PAGE 37

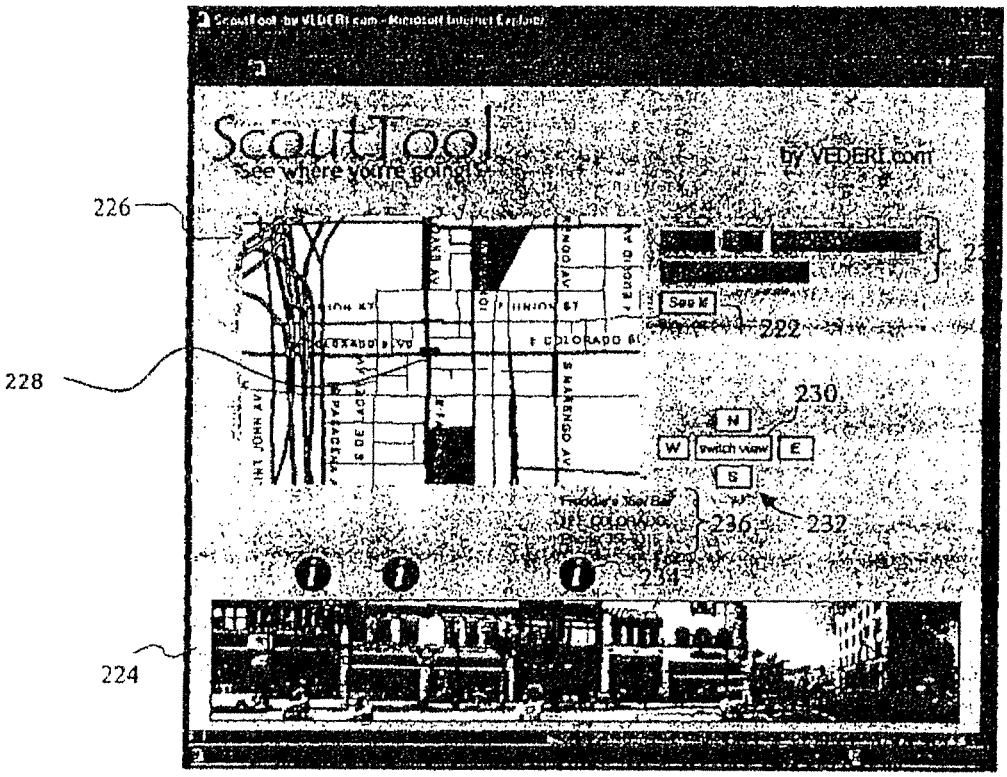


Fig.16

EXHIBIT A
PAGE 38