Exhibit B

VIVITRO ADC™ HEART VALVE DURABILITY TESTER



ViVitro ADC Heart Valve Durability Tester
- 6 test module configuration

Information and images are accurate as of publication, but subject to change.

Automatic Dual Control Technology (ADC)
Greater accuracy, less manual interaction saves time

ADC automates individual test module stroke and pressure control.

- Dedicated linear electromagnetic motor utilizes position feedback for consistent heart valve opening.
- By-pass restrictor with patented control algorithm automatically maintains valve differential pressure.
- Continuous real-time data analysis counts every ISO cycle and yields 0% count error.

A prewired controller unit and data acquisition system accommodates any combination of up to 6 test modules.

Transparent customizable test chambers are designed for maximum flexibility to fit any valve size and geometry with optimum inflow, outflow, and lateral visibility on test samples.

ViVitro ADC Heart Valve Durability Tester independent test modules enable fast, easy interchangeability of test samples and system components with minimum disruptions to adjacent on-going test modules.

Automatic Dual Control technology maintains valve loading conditions throughout the entire test for up to 6 individually controlled chambers.

Flow Loop System autonomously runs under a low hydrostatic pressure head, which decreases the load on all seals and bellows. No external pressure source or compressor is required.

ViVitro ADC Heart Valve Durability Tester meets ISO 5840 AWT, DFM test requirements for all valve types and designs including: transcatheter and surgical valves: aortic, mitral, pulmonary and tricuspid valve technologies, biological tissue valves, rigid metallic or polymeric and soft polymeric valve technologies.


ViVitro ADC Heart Valve Durability Tester can be used to assess cardiac valve repair devices, transcatheter cardiac occluders, and cardiac implant devices.

More ViVitro ADC Heart Valve Durability Tester Features

- True independent test modules with no fluid connections and dedicated electronics including linear electromagnetic motors, automated by-pass control, and temperature measurement.
- Automatic control system maintains optimum valve loading conditions during accelerated wear or real time testing.
- Large, customizable test chamber design fits all valve sizes and geometry and accommodates supporting structure(s).
- Modular system optimizes part and component interchangeability.
- Standalone architecture eliminates neighboring module disruptions.
- Vertical test sample configuration minimizes gravity effects on valve leaflets, leading to symmetric wear.
- Valve holder design facilitates chamber seal integrity.
- Integrated anti-vibration systems minimize pressure signal disruptions and improve high speed video quality.
- Inflow and outflow chamber annular compliance rings optimize differential pressure waveforms.
- Independent heater and temperature sensors each test module and corresponding test valve.
- Adjustable intensity annular LED light delivers maximum high-speed imaging luminosity with minimal reflection impact.
- Customizable valve annulus ring fits all valve geometries.
- Adjustable outflow pressure sensor height accommodates different valve designs, including valves in conduits.
- Pressure design features low system mean (approx. 10 mmHg) for load reduction and increased lifespan of seals and bellows. No external pressure source or compressor required.
- Camera holder ensures repeatable high-speed camera positioning, increased test image capture quality and reliability between inspection cycles.
- Embedded safety systems include bellows leakage sensor, fluid level detector, temperature change and pressure drop monitoring.
- Sliding test module mechanism provides test sample inflow visualization and ease of servicing.
- Optimum test chamber visibility for image capture in outflow, inflow, front, lateral, and 45° viewing positions.

ViVitro ADC Heart Valve Durability Tester - 2 test module configuration

Information and images are accurate as of publication, but subject to change.

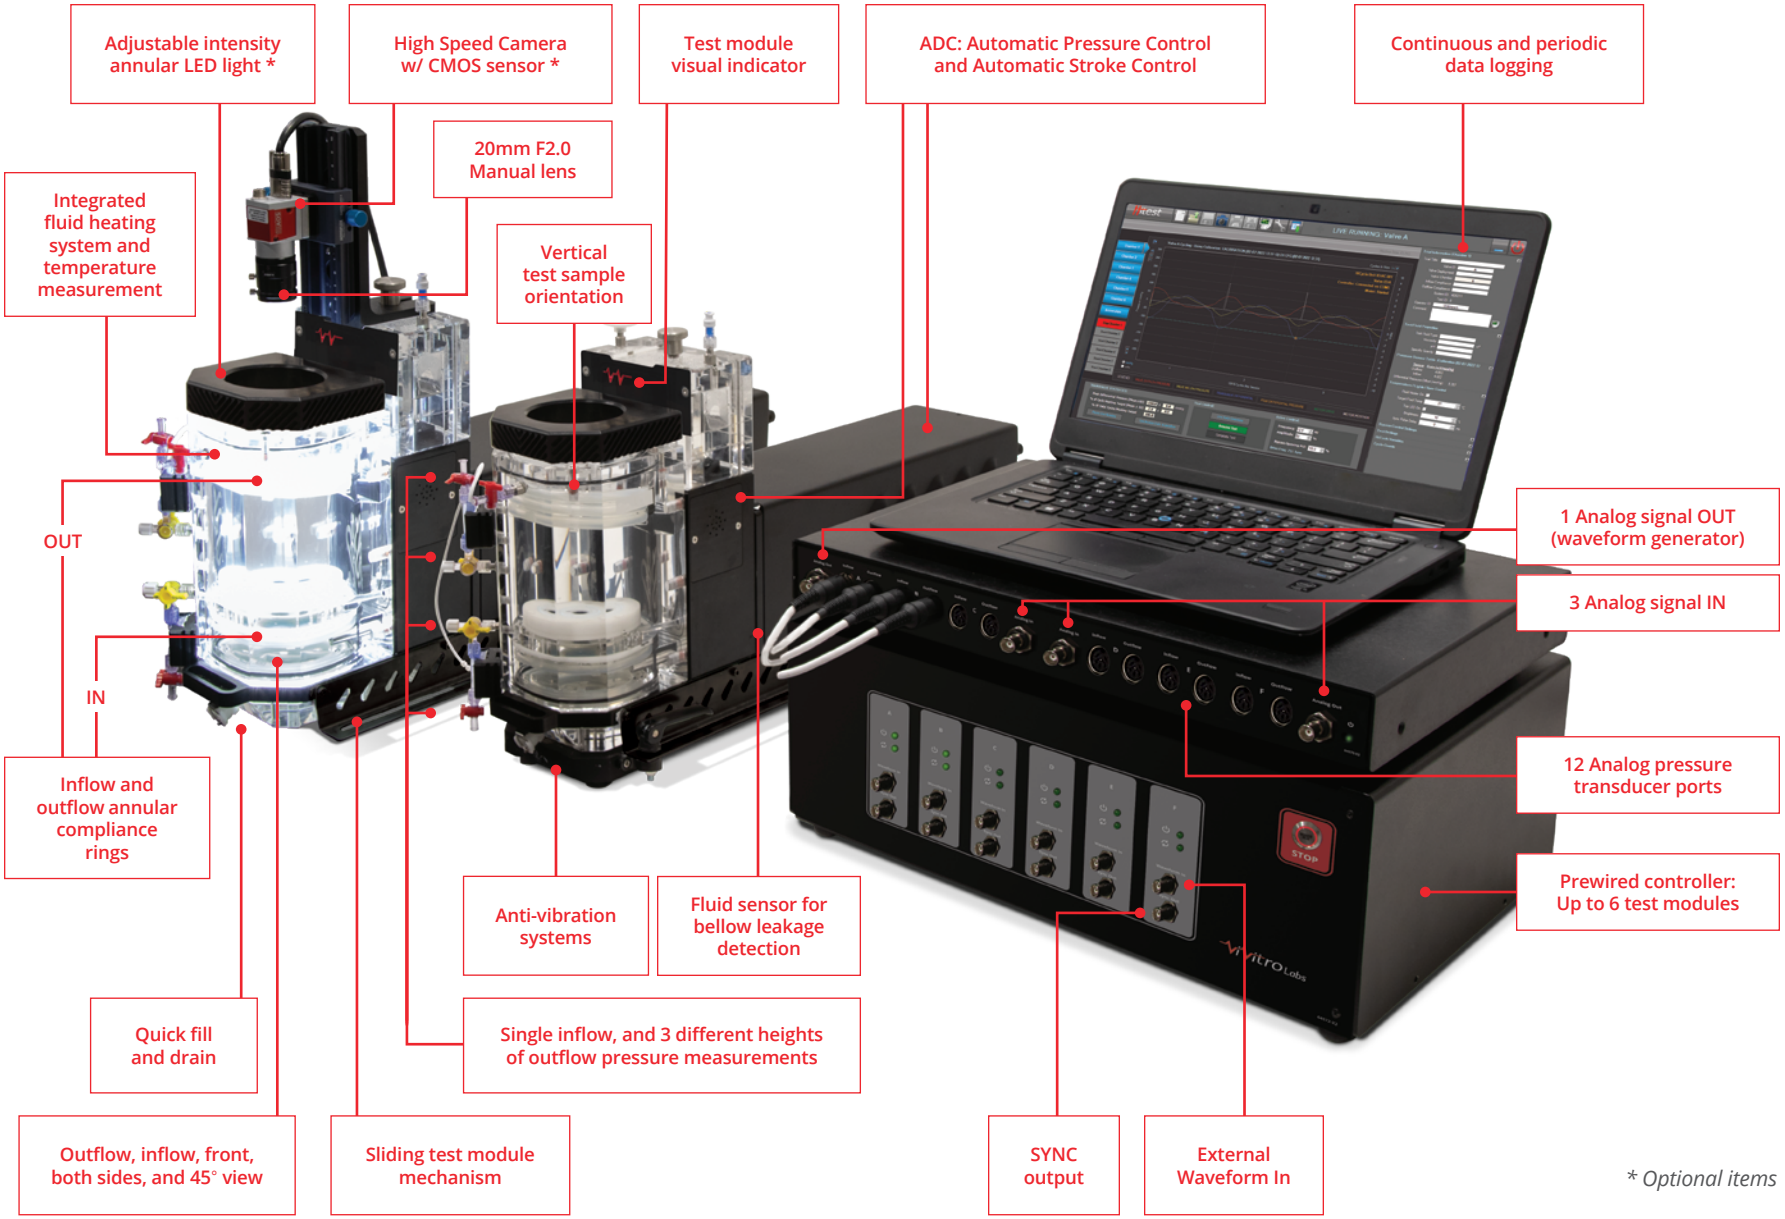

* *Optional items*

Specifications

Test module weight:	Empty = 20.6 kg/module Full = 22.1 kg/module
Full Controller and Data Acquisition unit weight:	8.4 kg
Footprint - 6 modules configuration:	Min Bench Length = 1650 mm* Min Bench Depth = 600 mm Height = 362 mm (without Camera) Height = 400 mm (with Camera)
Footprint - 2 modules configuration:	Min Bench Length = 850 mm* Min Bench Depth = 600 mm Height = 362 mm (without Camera) Height = 400 mm (with Camera)
Controller power supply requirements fully loaded:	675 W w/ 6 chambers with controller, 1 light ring, heaters on, at 100 mmHg No DAQ, No PC
System operating frequencies[2]: *[2] Tested w/ calibrated orifice*	1 Hz to 70 Hz[1] *[1] Test sample behavior and frequency response dependant.*
Test chamber diameter	Max support OD: 95 mm
Test chamber height & clearance:	Total Height/clearance up to 113.5 mm
Piston max stroke volume:	38 ml/stroke
Test chamber transparency:	Inflow, outflow, left and right, 1 angle at right 45°
Average hydrostatic pressure head:	10 mmHg

** Minimal distance between units: 30 mm*



ViVitro ADC Heart Valve Durability Tester
- 1 test module configuration

Information and images are accurate as of publication, but subject to change.




Information and images are accurate as of publication, but subject to change.

Software

The ViVitro ADC Heart Valve Durability Tester with Automatic Dual Control Technology uses a proprietary software platform with a user- friendly interface. All in-software allows individual control of each test module.

Features

- Independent settings and controls for each test module, including stroke amplitude, fluid bypass control for differential pressure adjustment, test frequency, temperature, and many more
- Fully software-controlled system requires no manual adjustments
- Continuous and/or periodic data monitoring records ISO 5840 conformance as required for AWT and DFM
- Easy control and settings navigation between test modules
- Integrated pressure calibration wizard
- Waveforms display for inflow outflow pressure, differential pressure
- Individual test module parameters display windows show passing cycles count, operating frequency, fluid temperature, peak to peak differential pressure, ¨% cycle pass, % pressure pass, and total number of passing cycles
- Test sample identification data embedded in test log with calibration values

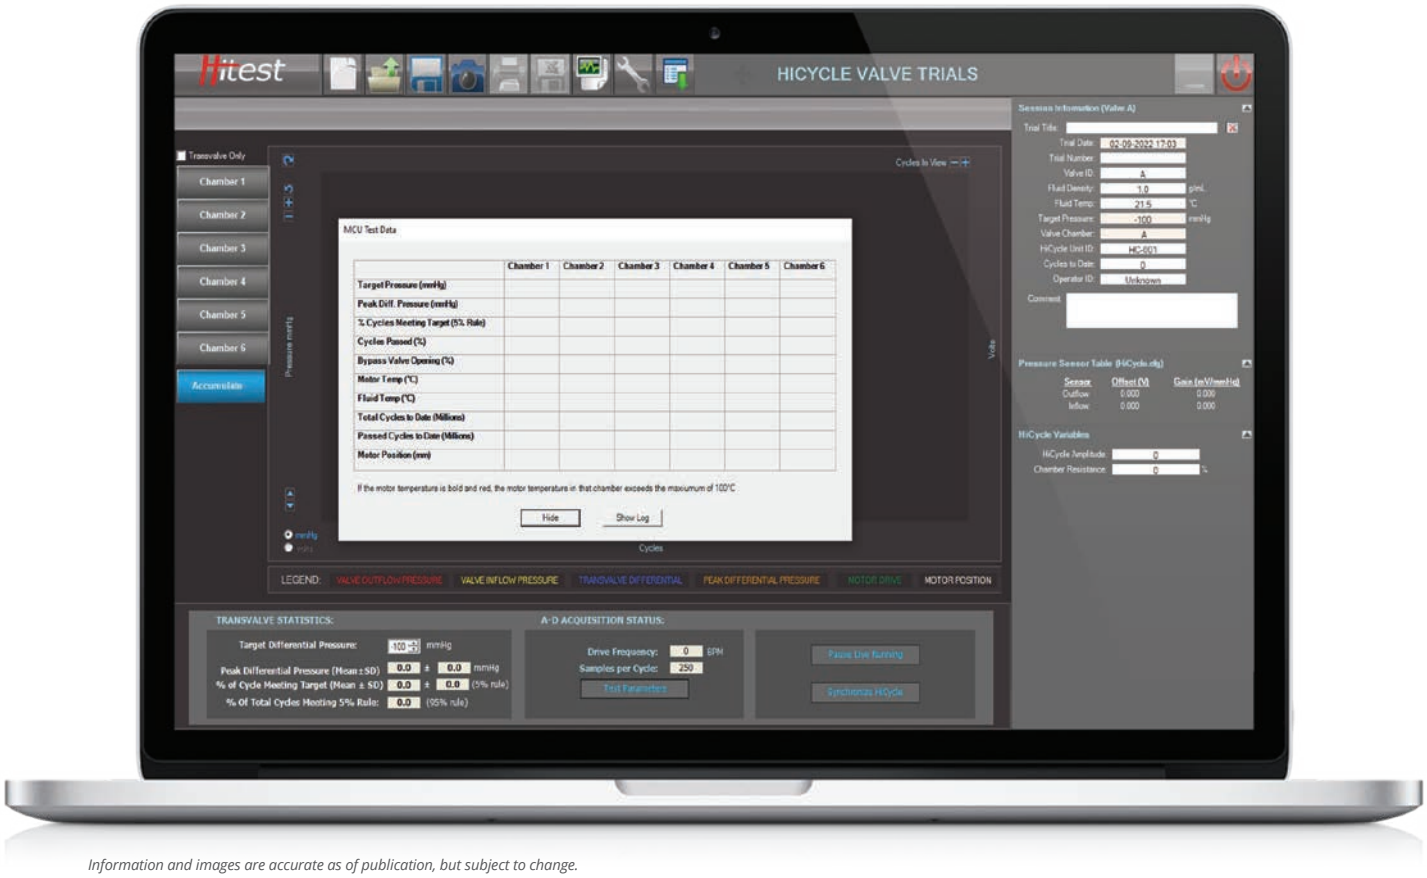

Information and images are accurate as of publication, but subject to change.

Continuous data log mode

Cycle to cycle information (peak differential, % of cycle meeting target pressure) can be collected for a predefined periods of time and saved over multiple .CSV files. Data is recorded in engineering units.

Period data log mode

- Fixed number of cycles captured
- Periodic data report automatically generated based on user predefined parameters:
- Ability to periodically save entire waveform with user(s) defined output data (inflow and outflow waveforms minimum capture, and other test parameters)
- User-friendly field selector for output data

No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, scanning or otherwise without the prior written permission of the Publisher. Information and images are accurate as of publication, but subject to change.

Limit of Liability/Disclaimer of Warranty: While the publisher and author have used their best efforts in preparing this document, they make no representation or warranties with respect to the accuracy or completeness of the contents of this document and specifically disclaim any implied warranties of merchantability or fitness for a particular purpose. No warranty may be created or extended by sales representatives or written sales material. The advice and strategies contained herein may not be suitable for your situation. Neither the Publisher nor author shall be liable for any loss of profit or any other commercial damages, including but not limited to special, incidental, consequential or other damages.

455 Boleskine Road, Victoria B.C. Canada, V8Z 1E7 | (250) 388-3531
24-26 Blvd. Gay Lussac, Immeuble Energie, 13014 Marseille, France | +33 4 86 68 68 10
info@ViVitroLabs.com | www.ViVitroLabs.com

Copyright © 2022 by ViVitro Labs Inc. All rights reserved.